



TEST REPORT IEC 60335-2-9 Safety of household and similar electrical appliances Part 2: Particular requirements for grills, toasters and similar cooking appliances	
Report Number.....	210201198SHA-001
Date of issue.....	2021-04-13; Modification 3: 2023-09-25
Total number of pages	70 pages test report (Include 10 pages of photograph)
Name of Testing Laboratory preparing the Report	Intertek Testing Service Shanghai Ltd
Applicant's name	Ningbo Joosung Electric Appliance Co., LTD.
Address.....	No. 586, XinXing san Road, High-tech industrial development zone, Cixi City, Ningbo, China
Test specification:	
Standard.....	EN 60335-2-9:2003+A1:2004+A2:2006+A12:2007+A13:2010+AC:2011+AC:2012 used in conjunction with EN 60335 1:2012+ AC:2014+A11:2014+A13:2017+A1:2019+A2:2019+A14:2019+A15:2021 and EN 62233:2008
Test procedure	CE-LVD
Non-standard test method	EK1-AG2:2018-05
Test Report Form No.	IEC60335_2_9K
Test Report Form(s) Originator	LCIE
Master TRF	Dated 2014-08
<p>Copyright © 2014 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.</p> <p>This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.</p> <p>This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.</p>	
General disclaimer:	
<p>The test results presented in this report relate only to the object tested.</p> <p>This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.</p>	

Test item description	Hot-air fryer
Trade Mark	--
Manufacturer.....	Ningbo Joosung Electric Appliance Co., LTD.
Model/Type reference	AF-001, AF-002, AF-002A, AF-005, AF-005A, AF-005-1, AF-006, AF-006A, AF-006D, AF-009, AF-009A, AF-010, AF-010A, AF-012, AF-012A, AF-015, AF-015A, AF-016, AF-016A, AF-017A, AF-001B, AF-007C, AF-022, AF-005A-1, AF-051
Ratings	220-240V~, 50-60Hz, Class I AF-001, AF-006, AF-006A, AF-001B, AF-007C, AF-051: 1000W; AF-015, AF-015A and AF-006D: 1200W; AF-002, AF-002A and AF-022: 1300W; AF-009 and AF-009A: 1400W; AF-010, AF-010A, AF-016, AF-016A and AF-017A: 1500W; AF-005, AF-005A, AF-005-1, AF-012, AF-012A and AF-005A-1: 1700W.

Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):		
<input checked="" type="checkbox"/>	Testing Laboratory:	Intertek Testing Service Shanghai Ltd
Testing location/ address		Building No. 86, 1198 Qinzhou Road (North), Shanghai 200233, China
<input type="checkbox"/>	Associated CB Testing Laboratory:	
Testing location/ address		N/A
Tested by (name, function, signature)		Charlie Chen (Engineer) <i>Charlie Chen</i>
Approved by (name, function, signature) ..		Chain Zhang (Reviewer) <i>Chain Zhang</i>
<input type="checkbox"/>	Testing procedure: TMP/CTF Stage 1:	
Testing location/ address		N/A
Tested by (name, function, signature)		N/A
Approved by (name, function, signature) ..		N/A
<input type="checkbox"/>	Testing procedure: WMT/CTF Stage 2:	
Testing location/ address		N/A
Tested by (name + signature)		N/A
Witnessed by (name, function, signature) ..		N/A
Approved by (name, function, signature) ..		N/A
<input type="checkbox"/>	Testing procedure: SMT/CTF Stage 3 or 4:	
Testing location/ address		N/A
Tested by (name, function, signature)		N/A
Witnessed by (name, function, signature) ..		N/A
Approved by (name, function, signature) ..		N/A
Supervised by (name, function, signature) :		N/A

List of Attachments (including a total number of pages in each attachment):	
None	
Summary of testing:	
From the result of our inspection and tests on the submitted samples, we conclude that they comply with the requirements of the standards.	
Tests performed (name of test and test clause):	Testing location:
Refer to description for Modification 3 (page 7) for details.	Same as previous page.
Summary of compliance with National Differences	
List of countries addressed:	
The national differences of EU group have been checked.	
<input checked="" type="checkbox"/> The product fulfils the requirements of <u>EN 60335-2-9:2003+A1:04+A2:06+A12:07+A13:10+AC:11+AC:12+EK1-AG2:2018-05 used in conjunction with EN 60335-1:2012+A11:2014+A13:2017+A1:2019+A2:2019+A14:2019+A15:2021 and EN 62233:2008</u>	
Copy of marking plate: (Representative)	
<div style="border: 1px solid black; padding: 10px; margin: 0 auto; width: fit-content;"> <p>AF-001 220-240V~, 50-60Hz, 1000W</p> <p> </p> <p>Ningbo Joosung Electric Appliance Co., LTD. No. 586, XinXing san Road, High-tech industrial development zone, Cixi City, Ningbo, China</p> </div>	
Note: When the equipment is vended to EU, then name and address of the importer or authorized representative within the EEA shall be added on the equipment.	

Test item particulars :	
Classification of installation and use : Portable appliance, household and indoor use	
Supply Connection : Type Y attachment	
..... :	
Possible test case verdicts:	
- test case does not apply to the test object: N/A	
- test object does meet the requirement.....: P (Pass)	
- test object does not meet the requirement: F (Fail)	
Testing:	
Date of receipt of test item: 2023-07-24	
Date (s) of performance of tests: 2023-07-24 to 2023-09-25	
General remarks:	
"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.	
Throughout this report a <input checked="" type="checkbox"/> comma / <input type="checkbox"/> point is used as the decimal separator.	
COMMISSION IMPLEMENTING DECISION (EU) 2017/1357 has been considered.	
This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.	
Manufacturer's Declaration per sub-clause 4.2.5 of IECEE 02:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided..... :	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies) : Ningbo Joosung Electric Appliance Co., LTD. No. 586, XinXing san Road, High-tech industrial development zone, Cixi City, Ningbo, China	

General product information:

Models covered by this report are portable Hot-air fryers for household indoor use only. It employed thermal link or non-self-resetting thermal cut out to safeguard the appliances.

Model summary:

Model	Rating (W)	Mechanical control	Electronic control	Thermal link	Non-self-resetting thermal cut out
AF-001	1000	√		√	
AF-001B	1000	√		√	
AF-002	1300	√		√	
AF-002A	1300		√	√	
AF-005	1700	√			√
AF-005A	1700		√		√
AF-005-1	1700	√			√
AF-006	1000	√		√	
AF-006A	1000		√	√	
AF-006D	1200	√		√	
AF-009	1400	√			√
AF-009A	1400		√		√
AF-010	1500	√			√
AF-010A	1500		√		√
AF-012	1700	√			√
AF-012A	1700		√		√
AF-015	1200	√		√	
AF-015A	1200		√	√	
AF-016	1500	√			√
AF-016A	1500		√		√
AF-017A	1500		√		√
AF-007C	1000		√	√	
AF-022	1300	√			√
AF-005A-1	1700		√		√
AF-051	1000	√		√	

Some model characteristic as the following description:

1. AF-001 is similar to AF-006, the difference in appearance and size. AF-001 is smaller than AF-006.
2. AF-005 is same as AF-005-1, except for appearance of knob.
3. AF-006D is same as AF-015, except for appearance of upper enclosure.
4. AF-010 is same as AF-016, except for appearance. Same way as AF-010A and AF-016A.
5. AF-016A is similar to AF-017A, the difference in appearance and control PCB.
6. AF-001B is same as AF-001, except for AF-001B use non-adjustable thermostat, AF-001B use adjustable thermostat.
7. AF-007C is similar to AF-006A, the difference in appearance, power PCB and control PCB.
8. AF-022 is same as AF-010, except for appearance and motor.
9. AF-005A is same as AF-005A-1, except for power PCB and control PCB.
10. AF-051 uses a different motor than the others.
11. AF-005, AF-005-1, AF-005A and AF-005A-1 have two optional motors.

Tests are performed on all models, the AF-001, AF-002A, AF-005, AF-005A, AF-006A, AF-009A, AF-012A, AF-015A, AF-016A, AF-001B, AF-007C, AF-010A, AF-017A, AF-022, AF-005A-1 and AF-051 which are selected as representative for the tests and other models were also tested while mentioned, finally only the most unfavourable results were recorded.

Modification 3:

The original test report ref. No. 210201198SHA-001 dated on 2021-04-13, with amendment 1 dated on 2021-07-30, with Modification 1 dated on 2022-08-30, with Modification 2 dated on 2023-04-07, was modified on 2023-09-25 to include the following addition:

1. Added a new model of AF-051.
2. Add alternative Timer (for AF-001, AF-002, AF-005, AF-005-1, AF-006, AF-006D, AF-009, AF-010, AF-012, AF-015, AF-016, AF-001B, AF-022, AF-051), Interlock switch, Motor (for AF-005, AF-005A, AF-005-1, AF-005A-1), Thermal link (for AF-002, AF-002A) and Internal wire for NTC.
3. Add new components: Non-adjustable thermostat (for AF-051), Motor (for AF-051), Heating element (for AF-051) and Thermal link (for AF-051).
4. Add optional motor for AF-005, AF-005-1, AF-005A and AF-005A-1.
5. The certificate holder and factory are changed from the original " Ningbo Jusheng Electric Appliance Co., LTD." To " Ningbo Joosung Electric Appliance Co., LTD.".
6. Address changed from " Room 3036, No.1, XinXing Yi Lu, Hi-Tech Industry District Cixi Zhejiang, P. R. China" to " No. 586, XinXing san Road, High-tech industrial development zone, Cixi City, Ningbo, China ".
7. Update Table 24.1.

After review, relevant tests are performed on AF-051, AF-005, AF-005A and AF-005A-1.

Clause concerned: Cl.7, Cl.8, Cl.10, Cl.11, Cl.13, Cl.15, Cl.16, Cl.19, Cl.20, Cl.21, Cl.22, Cl.23, Cl.24, Cl.25, Cl.27 Annex EMF need to be concerned. Other clauses which not mentioned in the report were referred to original test report.

Table concerned: Table 10.1, 11.8, 11.Z105, 13.2, 13.3, 16.2, 16.3, 19, 19.7, 19.13, 24.1, 29.1, 29.2, 30.1, 30.2.

IEC 60335-2-9			
Clause	Clause	Clause	Clause
7	MARKING AND INSTRUCTIONS		
7.1	Rated voltage or voltage range (V)	Refer to marking	P
	Symbol for nature of supply, or.....	Refer to marking	P
	Rated frequency (Hz)	Refer to marking	P
	Rated power input (W), or	Refer to marking	P
	Rated current (A)		N/A
	Manufacturer's or responsible vendor's name, trademark or identification mark	Refer to marking	P
	Model or type reference.....	Refer to marking	P
	Symbol IEC 60417-5172, for class II appliances		N/A
	IP number, other than IPX0		N/A
	Symbol IEC 60417-5180, for class III appliances, unless		N/A
	the appliance is operated by batteries only		N/A
	Do not immerse beyond this level (IEC 60335-2-9)		N/A
	Hot surface		N/A
	Symbol IEC 60417-5036, for the enclosure of electrically-operated water valves in external hose-sets for connection of an appliance to the water mains, if the working voltage exceeds extra-low voltage		N/A
7.3	Range of rated values marked with the lower and upper limits separated by a hyphen	220-240V, 50-60Hz	P
	Different rated values marked with the values separated by an oblique stroke		N/A
7.5	Appliances with more than one rated voltage or one or more rated voltage ranges, marked with rated input or rated current for each rated voltage or range, unless		N/A
	the power input is related to the arithmetic mean value of the rated voltage range		P
	Relation between marking for upper and lower limits of rated power input or rated current and voltage is clear		N/A
7.6	Correct symbols used		P
	Symbol for nature of supply placed next to rated voltage		P
	Symbol for class II appliances placed unlikely to be confused with other marking		N/A

IEC 60335-2-9			
Clause	Clause	Clause	Clause
	Units of physical quantities and their symbols according to international standardized system		P
7.8	Except for type Z attachment, terminals for connection to the supply mains indicated as follows:		
	- marking of terminals exclusively for the neutral conductor (letter N)		N/A
	- marking of protective earthing terminals (symbol IEC 60417-5019)		P
	- marking not placed on removable parts		P
7.9	Marking or placing of switches which may cause a hazard		P
7.10	Indications of switches on stationary appliances and controls on all appliances by use of figures, letters or other visual means	See photo documentation for details.	P
	This applies also to switches which are part of a control		P
	If figures are used, the off position indicated by the figure 0		P
	The figure 0 indicates only OFF position, unless no confusion with the OFF position		P
7.11	Indication for direction of adjustment of controls		P
7.12	Instructions for safe use provided		P
	Details concerning precautions during user maintenance		P
	The instructions state that:		
	- the appliance is not to be used by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction	Replaced by EN 60335-1:2012	N/A
	- children being supervised not to play with the appliance	Replaced by EN 60335-1:2012	N/A
	For a part of class III construction supplied from a detachable power supply unit, the instructions state that the appliance is only to be used with the unit provided		N/A
	Instructions for class III appliances state that it must only be supplied at SELV, unless		N/A
	it is a battery-operated appliance, the battery being charged outside the appliance		N/A

IEC 60335-2-9			
Clause	Clause	Clause	Clause
	Appliance with inlet and intended to be immersed for cleaning, instruction sheet including in substance: (IEC 60335-2-9)		
	- remove connector before cleaning		N/A
	- dry appliance inlet before re-use		N/A
	The instructions for use for appliances intended to be used with a connector incorporating a thermostat shall state that only the appropriate connector must be used (IEC 60335-2-9)		N/A
	Instructions for appliances for outdoor use (IEC 60335-2-9):		N/A
	The appliance is suitable for outdoor use (IEC 60335-2-9)		N/A
	The supply cord should be regularly examined for signs of damage, and if the cord is damaged, the appliance must not be used (IEC 60335-2-9)		N/A
	The appliance must be supplied through a residual current device (RCD) having a rated residual operating current not exceeding 30mA (IEC 60335-2-9)		N/A
	The appliance is to be connected to a socket-outlet having an earthing contact (class I) (IEC 60335-2-9)		N/A
	The temperature of accessible surfaces may be high when the appliance is operating (IEC 60335-2-9)		N/A
	If symbol IEC 60417-5041 (DB: 2002-10) is marked on appliances, the instructions shall state that the surfaces are liable to get hot during use (IEC 60335-2-9)		N/A
	The instructions shall state that the appliances are not intended to be operated by means of an external timer or separate remote-control system (IEC 60335-2-9)		P
	Instructions for use		P
	For oven: The temperature of the door or the outer surface may be high when the appliance is operating (IEC 60335-2-9)		N/A
	For toaster: Bread may burn. Therefore toasters must not be used near or below curtains and other combustible materials. They must be watched (IEC 60335-2-9)		N/A

IEC 60335-2-9			
Clause	Clause	Clause	Clause
	For barbecue: WARNING: Charcoal or similar combustible fuels must not be used with this appliance. (IEC 60335-2-9)		N/A
	For barbecue: Maximum quantity of water to be poured into the appliance (IEC 60335-2-9)		N/A
	If top surface of a hotplate is of glass-ceramic or similar material and protects live parts, warning : If the surface is cracked, switch off the appliance to avoid the possibility of electric shock (IEC 60335-2-9)		N/A
	For induction hotplates: Metallic objects such as knives, forks, spoons and lids not be placed on the hotplate since they can get hot... (IEC 60335-2-9).		N/A
	For breadmakers: maximum quantities of flour and raising agent that may be used ... (IEC 60335-2-9)		N/A
7.12.5	Replacement cord instructions, type X attachment with a specially prepared cord		N/A
	Replacement cord instructions, type Y attachment	Type Y	P
	Replacement cord instructions, type Z attachment		N/A
7.13	Instructions and other texts in an official language	English	P
7.14	Marking clearly legible and durable, rubbing test as specified		P
	The height of the triangle used with symbol IEC 60417-5041(DB:2002-10) shall be at least 12mm (IEC 60335-2-9)		N/A
7.15	Markings on a main part		P
	Marking clearly discernible from the outside, if necessary after removal of a cover		P
	For portable appliances, cover can be removed or opened without a tool		N/A
	For stationary appliances, name, trademark or identification mark and model or type reference visible after installation		N/A
	For fixed appliances, name, trademark or identification mark and model or type reference visible after installation according to the instructions		N/A
	Indications for switches and controls placed on or near the components. Marking not on parts which can be positioned or repositioned in such a way that the marking is misleading		P

IEC 60335-2-9			
Clause	Clause	Clause	Clause
	The marking specified for hot surfaces shall be visible when the appliance is operated as in normal used (IEC 60335-2-9)		N/A
8	PROTECTION AGAINST ACCESS TO LIVE PARTS		
8.1	Adequate protection against accidental contact with live parts		P
8.1.1	Requirement applies for all positions, detachable parts removed		P
	Lamps behind a detachable cover not removed, if conditions met		N/A
	Insertion or removal of lamps, protection against contact with live parts of the lamp cap		N/A
	Use of test probe B of IEC 61032, with a force not exceeding 1 N: no contact with live parts		P
	Use of test probe B of IEC 61032 through openings, with a force of 20N: no contact with live parts		P
	For toasters having a crumb tray : use of test probe 41 of IEC 61032 : no contact through crumb tray with live parts that are disconnected by double pole switch using (IEC 60335-2-9)		N/A
8.1.2	Use of test probe 13 of IEC 61032, with a force not exceeding 1 N, through openings in class 0 appliances and class II appliances/constructions: no contact with live parts	Class II constructions	P
	Test probe 13 also applied through openings in earthed metal enclosures having a non-conductive coating: no contact with live parts		N/A
8.2	Class II appliances and constructions constructed so that there is adequate protection against accidental contact with basic insulation and metal parts separated from live parts by basic insulation only		P
	Only possible to touch parts separated from live parts by double or reinforced insulation		P
10	POWER INPUT AND CURRENT		
10.1	Power input at normal operating temperature, rated voltage and normal operation not deviating from rated power input by more than shown in table 1. :	(see appended table)	P
	Test carried out at upper and lower limits of the ranges for appliances with one or more rated voltage ranges, unless		N/A
	the rated power input is related to the arithmetic mean value		P

IEC 60335-2-9			
Clause	Clause	Clause	Clause
	Power input of induction hotplates measured separately (IEC 60335-2-9)		N/A
11	HEATING		
11.1	No excessive temperatures in normal use	(see appended table)	P
	Compliance for toasters is also checked by the test of 11. 101 (IEC 60335-2-9)		N/A
11.2	The appliance is held, placed or fixed in position as described	Tested as near to the walls as possible	P
	Radiant grills and raclette grills that are loaded from the front, rotary grills, ovens, breadmakers, cookers and hotplates are placed with their backs as near as possible to one of the walls of the test corner and away from the other wall (IEC 60335-2-9)		P
11.3	Temperature rises, other than of windings, determined by thermocouples		P
	Temperature rises of windings determined by resistance method, unless		P
	the windings are non-uniform or it is difficult to make the necessary connections		N/A
	If magnetic field of an induction hotplate unduly influences the results, temperature rises can be determined using platinum resistances or equivalent means (IEC 60335-2-9)		N/A
11.4	Heating appliances operated under normal operation at 1.15 times rated power input (W) :	(see appended table)	P
	If the temperature rise limits are exceeded in appliances incorporating motors, transformers or electronic circuits, and if the power input is lower than the rated power input, the test is repeated with the appliance supplied at 1,06 times rated voltage (IEC 60335-2-9)		N/A
11.7	Tests carried out in compliance with the paragraphs N° 1 to 11 (IEC 60335-2-9)		P
11.8	Temperature rises monitored continuously and not exceeding the values in table 3	(see appended table)	P
	If the temperature rise of a motor winding exceeds the value of table 3, or		N/A
	if there is doubt with regard to classification of insulation,		N/A
	tests of Annex C are carried out		N/A
	Sealing compound does not flow out		P

IEC 60335-2-9			
Clause	Clause	Clause	Clause
	Protective devices do not operate, except		P
	components in protective electronic circuits tested for the number of cycles specified in 24.1.4	For electronic control models (Electronic thermostat)	P
	For radiant grills, rotary grills, raclette grills, hotplates and cookers, instead of 65 K, the temperature rise of the wall of the test corner shall not exceed 75 K. (IEC 60335-2-9)		N/A
	When an appliance connector incorporates a thermostat, the temperature rise limit for the pins of the inlet does not apply (IEC 60335-2-9)		N/A
	The temperature rise limits of motors, transformers, components of electronic circuit and parts directly influenced by them may be exceeded when the appliance is operated at 1,15 times rated power input (IEC 60335-2-9)		N/A
	Cheese used in sandwich toasting attachments doesn't flow into places where it can give rise to a hazard, such as reducing clearances or creepage distances below the values specified in Clause 29 (IEC 60335-2-9).		N/A
13	LEAKAGE CURRENT AND ELECTRIC STRENGTH AT OPERATING TEMPERATURE		
13.1	Leakage current not excessive and electric strength adequate		P
	Heating appliances operated at 1.15 times the rated power input (W)	(see appended table)	P
	Motor-operated appliances and combined appliances supplied at 1.06 times the rated voltage (V)		N/A
	Protective impedance and radio interference filters disconnected before carrying out the tests		N/A
	grill incorporated in oven, oven or grill operated most unfavourable (IEC 60335-2-9).		N/A
13.2	For class 0, class II and class III appliances, leakage current measured by means of the circuit described in figure 4 of IEC 60990		N/A
	For other appliances, a low impedance ammeter may be used	Class I	P
	Leakage current measurements.....	(see appended table)	P

IEC 60335-2-9			
Clause	Clause	Clause	Clause
	If earthed metal between live parts and surface of glass-ceramic (or similar) of hotplate, leakage current between live parts and each of vessels in turn connected to earthed metal not exceeding 0,75 mA (IEC 60335-2-9)		N/A
	If no earthed metal between live parts and surface of glass-ceramic (or similar) of hotplate, leakage current between live parts and each of vessels in turn not exceeding 0,25 mA (IEC 60335-2-9)		N/A
13.3	The appliance is disconnected from the supply		P
	Electric strength tests according to table 4..... :	(see appended table)	P
	test voltage of 1000V if earthed metal between live parts and surface of glass-ceramic (or similar) of hotplate (IEC 60335-2-9).		N/A
	test voltage of 3000 V if no earthed metal between live parts and surface of glass-ceramic (or similar) of hotplate (IEC 60335-2-9).		N/A
	No breakdown during the tests		P
15	MOISTURE RESISTANCE		
15.3	Appliances proof against humid conditions		P
	Checked by test Cab: Damp heat steady state in IEC 60068-2-78		P
	Detachable parts removed and subjected, if necessary, to the humidity test with the main part		P
	Humidity test for 48 h in a humidity cabinet	93%RH, 23°C	P
	Reassembly of those parts that may have been removed		P
	The appliance withstands the tests of clause 16		P
16	LEAKAGE CURRENT AND ELECTRIC STRENGTH		
16.1	Leakage current not excessive and electric strength adequate		P
	Protective impedance disconnected from live parts before carrying out the tests		N/A
	Tests carried out at room temperature and not connected to the supply		P
	For hotplates, the tests are carried out with a vessel as specified for normal operation placed on each cooking zone (IEC 60335-2-9).		N/A
16.2	Single-phase appliances: test voltage 1.06 times rated voltage (V)	254,4V	P

IEC 60335-2-9			
Clause	Clause	Clause	Clause
	Three-phase appliances: test voltage 1.06 times rated voltage divided by $\sqrt{3}$ (V)..... :		N/A
	Leakage current measurements..... :	(see appended table)	P
	Limit values doubled if:		
	- all controls have an off position in all poles, or		N/A
	- the appliance has no control other than a thermal cut-out, or		N/A
	- all thermostats, temperature limiters and energy regulators do not have an off position, or		N/A
	- the appliance has radio interference filters		N/A
	With the radio interference filters disconnected, the leakage current do not exceed limits specified..... :	(see appended table)	N/A
	If earthed metal between live parts and surface of glass-ceramic (or similar) of hotplate, leakage current between live parts and each of vessels in turn connected to earthed metal not exceeding 0,75 mA (IEC 60335-2-9)		N/A
	If no earthed metal between live parts and surface of glass-ceramic (or similar) of hotplate, leakage current between live parts and each of vessels in turn not exceeding 0,25 mA (IEC 60335-2-9)		N/A
16.3	Electric strength tests according to table 7..... :	(see appended table)	P
	Test voltage applied between the supply cord and inlet bushing and cord guard and cord anchorage as specified..... :	(see appended table)	P
	test voltage of 1250 V if earthed metal between live parts and surface of glass-ceramic (or similar) of hotplate. (IEC 60335-2-9)		N/A
	test voltage of 3000 V if no earthed metal between live parts and surface of glass-ceramic (or similar) of hotplate. (IEC 60335-2-9)		N/A
	No breakdown during the tests		P
19	ABNORMAL OPERATION		
19.1	The risk of fire, mechanical damage or electric shock under abnormal or careless operation obviated		P
	Electronic circuits so designed and applied that a fault will not render the appliance unsafe :	For electronic control models	P
	Appliances incorporating heating elements subjected to the tests of 19.2 and 19.3, and		P

IEC 60335-2-9			
Clause	Clause	Clause	Clause
	if the appliance also has a control that limit the temperature during clause 11 it is subjected to the test of 19.4, and		P
	if applicable, to the test of 19.5		P
	Appliances incorporating PTC heating elements are also subjected to the test of 19.6		N/A
	Appliances incorporating motors subjected to the tests of 19.7 to 19.10, as applicable		P
	Appliances incorporating electronic circuits subjected to the tests of 19.11 and 19.12, as applicable	For electronic control models	P
	Appliances incorporating contactors or relays subjected to the test of 19.14, being carried out before the tests of 19.11		P
	Appliances incorporating voltage selector switches subjected to the test of 19.15		N/A
	Unless otherwise specified, the tests are continued until a non-self-resetting thermal cut-out operates, or		P
	until steady conditions are established		P
	If a heating element or intentionally weak part becomes open-circuited, the relevant test is repeated on a second sample		P
	Tests of 19.4 and 19.5 are only applicable to: -breadmakers, contact grills, food dehydrators - ovens, roasters, hotplates, cookers, rotary grills if they incorporate a timer or if their instructions indicate a cooking operation longer than 1h (IEC 60335-2-9)		P
	Toasters are subjected to the tests 19.101 and 19.102 (IEC 60335-2-9)		N/A
	Induction hotplates are subjected to the tests 19.103 and 19.104 (IEC 60335-2-9)		N/A
19.2	Test of appliances with heating elements with restricted heat dissipation; test voltage (V), power input of 0.85 times rated power input (W) :	(see appended table)	P
	Radiant grills, raclette grills that are loaded from the front , rotary grills, ovens, hotplates and cookers are placed as near as possible to the walls of the test corner..... (IEC 60335-2-9)		N/A
	They are tested empty with lids open or closed whichever is the more unfavourable (IEC 60335-2-9)	Container installed	P

IEC 60335-2-9			
Clause	Clause	Clause	Clause
	Hotplates are operated without a vessel and with the controls adjusted to the highest setting (IEC 60335-2-9)		N/A
	Induction hotplates are operated under conditions of clause 11 but with empty vessels, controls adjusted to the highest setting (IEC 60335-2-9)		N/A
	Cookers are only tested with the heating unit that results in the most unfavourable conditions, their controls adjusted to the highest setting. However ovens are operated if they do not have an indicating lamp to show when they are switched on, controls adjusted to the highest setting (IEC 60335-2-9)		N/A
19.3	Test of 19.2 repeated; test voltage (V), power input of 1.24 times rated power input (W)	(see appended table)	P
19.4	Test conditions as in clause 11, any control limiting the temperature during tests of clause 11 short-circuited		P
	Air-circulating fans of food dehydrators disconnected (IEC 60335-2-9)		N/A
19.5	Test of 19.4 repeated on Class 0I and I appliances with tubular sheathed or embedded heating elements. No short-circuiting, but one end of the element connected to the sheath	(see appended table)	P
	The test repeated with reversed polarity and the other end of the heating element connected to the sheath		P
	The test is not carried out on appliances intended to be permanently connected to fixed wiring and on appliances where an all-pole disconnection occurs during the test of 19.4		N/A
19.7	Stalling test by locking the rotor if the locked rotor torque is smaller than the full load torque, or		P
	locking moving parts of other appliances		N/A
	Locked rotor, capacitors open-circuited one at a time		N/A
	Test repeated with capacitors short-circuited one at a time, unless		N/A
	capacitor is of class P2 of IEC 60252-1		N/A
	Appliances with timer or programmer supplied with rated voltage for each of the tests, for a period equal to the maximum period allowed.....		P
	Other appliances supplied with rated voltage for a period as specified.....		N/A

IEC 60335-2-9			
Clause	Clause	Clause	Clause
	Winding temperatures not exceeding values specified in table 8..... :	(see appended table)	P
19.13	During the tests the appliance does not emit flames, molten metal, poisonous or ignitable gas in hazardous amounts		P
	Temperature rises not exceeding the values shown in table 9..... :	(see appended table)	P
	Compliance with clause 8 not impaired		P
	If the appliance can still be operated it complies with 20.2		N/A
	Insulation, other than of class III appliances or class III constructions that do not contain live parts, withstands the electric strength test of 16.3, the test voltage as specified in table 4:		
	- basic insulation (V)..... :	1000V/1min	P
	- supplementary insulation (V)..... :	1750V/1min	P
	- reinforced insulation (V)..... :	3000V/1min	P
	After operation or interruption of a control, clearances and creepage distances across the functional insulation withstand the electric strength test of 16.3, the test voltage being twice the working voltage	480V	P
	The appliance does not undergo a dangerous malfunction, and		P
	no failure of protective electronic circuits, if the appliance is still operable		N/A
	Appliances tested with an electronic switch in the off position, or in the stand-by mode:		
	- do not become operational, or		P
	- if they become operational, do not result in a dangerous malfunction during or after the tests of 19.11.4		N/A
	If the appliance contains lids or doors that are controlled by one or more interlocks, one of the interlocks may be released provided that:		
	- the lid or door does not move automatically to an open position when the interlock is released, and		N/A
	- the appliance does not start after the cycle in which the interlock was released		N/A
	During the test of 19.102 any flame or smoke from the bread are ignored (IEC 60335-2-9)		N/A

IEC 60335-2-9			
Clause	Clause	Clause	Clause
	Temperature rise of the windings of induction hotplates not exceeding the values specified in 19.7 (IEC 60335-2-9)		N/A
20	STABILITY AND MECHANICAL HAZARDS		
20.1	Appliances having adequate stability		P
	Tilting test through an angle of 10°, appliance placed on an inclined plane/horizontal support, not connected to the supply mains; appliance does not overturn		P
	Tilting test repeated on appliances with heating elements, angle of inclination increased to 15°		P
	Possible heating test in overturned position; temperature rise does not exceed values shown in table 9		N/A
20.2	Moving parts adequately arranged or enclosed as to provide protection against personal injury		P
	Protective enclosures, guards and similar parts are non-detachable, and		P
	have adequate mechanical strength		P
	Enclosures that can be opened by overriding an interlock are considered to be detachable parts		P
	Self-resetting thermal cut-outs and overcurrent protective devices not causing a hazard by unexpected closure		N/A
	Not possible to touch dangerous moving parts with the test probe described		P
21	MECHANICAL STRENGTH		
21.1	Appliance has adequate mechanical strength and is constructed as to withstand rough handling		P
	Checked by applying 3 blows to every point of the enclosure like to be weak, in accordance with test Ehb of IEC 60068-2-75, spring hammer test, with an impact energy of 0,5 J	(see appended table)	P
	The appliance shows no damage impairing compliance with this standard, and		P
	compliance with 8.1, 15.1 and clause 29 not impaired		P
	If doubt, supplementary or reinforced insulation subjected to the electric strength test of 16.3		N/A
	If necessary, repetition of groups of three blows on a new sample		N/A

IEC 60335-2-9			
Clause	Clause	Clause	Clause
	For appliances intended for outdoor use, the impact energy is 0.7J (IEC 60335-2-9)		N/A
	Appliances incorporates visibly glowing heating elements located at the top of the oven and accessible to the test probe 41 of IEC 61032 (IEC 60335-2-9)		N/A
	For hotplates with surfaces of glass-ceramic or similar, three blows applied to parts surfaces not exposed to the test of 21.101, impact energy 0,70J ± 0,05 J. (IEC 60335-2-9).		N/A
21.2	Accessible parts of solid insulation having strength to prevent penetration by sharp implements		P
	Test not applicable if the thickness of supplementary insulation is at least 1 mm and reinforced insulation at least 2 mm		P
	The insulation is tested as specified, and does withstand the electric strength test of 16.3		N/A
22	CONSTRUCTION		
22.5	No risk of electric shock when touching the pins of the plug, for appliances having a capacitor with rated capacitance exceeding 0,1µF, the appliance being disconnected from the supply at the instant of voltage peak		P
	Voltage not exceeding 34 V (V)..... :	Max. 12V	P
22.6	Electrical insulation not affected by condensing water or leaking liquid		P
	Electrical insulation of Class II appliances not affected if a hose ruptures or seal leaks		N/A
	In case of doubt, test as described		N/A
22.9	Insulation, internal wiring, windings, commutators and slip rings not exposed to oil, grease or similar substances, unless		P
	the substance has adequate insulating properties		N/A
22.10	Not possible to reset voltage-maintained non-self-resetting thermal cut-outs by the operation of an automatic switching device incorporated within the appliance, if:		P
	- a non-self-resetting thermal cut-out is required by the standard, and		P
	- a voltage maintained non-self-resetting thermal cut-out is used to meet it		P

IEC 60335-2-9			
Clause	Clause	Clause	Clause
	Non-self-resetting thermal motor protectors have a trip-free action, unless		P
	they are voltage maintained		P
	Reset buttons of non-self-resetting controls so located or protected that accidental resetting is unlikely		P
22.11	Reliable fixing of non-detachable parts that provide the necessary degree of protection against electric shock, moisture or contact with moving parts		P
	Obvious locked position of snap-in devices used for fixing such parts		P
	No deterioration of the fixing properties of snap-in devices used in parts that are likely to be removed during installation or servicing		P
	Tests as described	50N pull and push to enclosure and handle, 50N push and 30N pull to knobs. 2Nm torque for timer knob and thermostat knob	P
22.12	Handles, knobs etc. fixed in a reliable manner		P
	Fixing in wrong position of handles, knobs etc. indicating position of switches or similar components not possible		P
	Axial force 15 N applied to parts, the shape being so that an axial pull is unlikely to be applied		N/A
	Axial force 30 N applied to parts, the shape being so that an axial pull is likely to be applied	Timer knob and thermostat knob	P
22.13	Unlikely that handles, when gripped as in normal use, make the operator's hand touch parts having a temperature rise exceeding the value specified for handles which are held for short periods only		P
22.14	No ragged or sharp edges creating a hazard for the user in normal use, or during user maintenance		P
	No exposed pointed ends of self-tapping screws or other fasteners, likely to be touched by the user in normal use or during user maintenance		P
22.17	Spacers not removable from the outside by hand or by means of a screwdriver or a spanner		P
22.18	Current-carrying parts and other metal parts resistant to corrosion		P
22.20	Direct contact between live parts and thermal insulation effectively prevented, unless		P

IEC 60335-2-9			
Clause	Clause	Clause	Clause
	material used is non-corrosive, non-hygroscopic and non-combustible		N/A
22.21	Wood, cotton, silk, ordinary paper and fibrous or hygroscopic material not used as insulation, unless		P
	impregnated		N/A
	This requirement does not apply to magnesium oxide and mineral ceramic fibres used for the electrical insulation of heating elements		P
22.22	Appliances not containing asbestos		P
22.23	Oils containing polychlorinated biphenyl (PCB) not used	No oils	P
22.24	Bare heating elements, except in class III appliances or class III constructions that do not contain live parts, adequately supported		N/A
	Heating elements constructed or supported so they are unlikely to become displaced in normal use. (IEC 60335-2-9)		N/A
	In case of rupture, the heating conductor is unlikely to come in contact with accessible metal parts		N/A
22.30	Parts serving as supplementary or reinforced insulation fixed so that they cannot be removed without being seriously damaged, or		P
	so constructed that they cannot be replaced in an incorrect position, and so that if they are omitted, the appliance is rendered inoperable or manifestly incomplete		P
22.31	Neither clearances nor creepage distances over supplementary and reinforced insulation reduced below values specified in clause 29 as a result of wear		P
	Neither clearances nor creepage distances between live parts and accessible parts reduced below values for supplementary insulation if wires, screws etc. become loose		P
22.32	Supplementary and reinforced insulation constructed or protected against pollution so that clearances or creepage distances are not reduced below the values in clause 29		P
	Supplementary insulation of natural or synthetic rubber resistant to ageing, or arranged and dimensioned so that creepage distances are not reduced below values specified in 29.2		N/A

IEC 60335-2-9			
Clause	Clause	Clause	Clause
	Ceramic material not tightly sintered, similar materials or beads alone not used as supplementary or reinforced insulation		P
	Insulating material in which heating conductors are embedded is considered to be basic insulation, not reinforced insulation		P
	Oxygen bomb test at 70 °C for 96 h and 16 h at room temperature		N/A
22.34	Shafts of operating knobs, handles, levers etc. not live, unless		P
	the shaft is not accessible when the part is removed		N/A
22.35	For other than class III constructions, handles, levers and knobs, held or actuated in normal use, not becoming live in the event of a failure of basic insulation		P
	Such parts being of metal, and their shafts or fixings are likely to become live in the event of a failure of basic insulation, are either adequately covered by insulation material or their accessible parts are separated from their shafts or fixings by supplementary insulation		P
	This requirement does not apply to handles, levers and knobs on stationary appliances, other than those of electrical components, provided they are reliably connected to an earthing terminal or earthing contact, or separated from live parts by earthed metal		N/A
	Insulating material covering metal handles, levers and knobs withstand the electric strength test of 16.3 for supplementary insulation		N/A
22.38	Capacitors not connected between the contacts of a thermal cut-out		P
22.41	No components, other than lamps, containing mercury		P
22.44	Appliances not having an enclosure that is shaped or decorated like a toy		P
22.45	When air is used as reinforced insulation, clearances not reduced below the values specified in 29.1.3 due to deformation as a result of an external force applied to the enclosure		P

IEC 60335-2-9			
Clause	Clause	Clause	Clause
22.105	Appliances have not openings on the underside that would allow small items to penetrate and touch live parts. (IEC 60335-2-9)	No such opening	P
	Distance measured between the supporting surface and live parts through openings (IEC 60335-2-9)		N/A
	Distance requested as specified: (IEC 60335-2-9)		N/A
23	INTERNAL WIRING		
23.1	Wireways smooth and free from sharp edges		P
	Wires protected against contact with burrs, cooling fins etc.		P
	Wire holes in metal well-rounded or provided with bushings		P
	Wiring effectively prevented from coming into contact with moving parts		P
23.5	The insulation of internal wiring subjected to the supply mains voltage withstanding the electrical stress likely to occur in normal use		P
	Basic insulation electrically equivalent to the basic insulation of cords complying with IEC 60227 or IEC 60245, or		N/A
	no breakdown when a voltage of 2000 V is applied for 15 min between the conductor and metal foil wrapped around the insulation		P
23.7	The colour combination green/yellow only used for earthing conductors		P
23.8	Aluminium wires not used for internal wiring	Aluminium wires not used	P
24	COMPONENTS		
24.1	Components comply with safety requirements in relevant IEC standards		P
	List of components..... :	(see appended table)	P
	If components have not been tested and found to comply with relevant IEC standard for the number of cycles specified, they are tested in accordance with 24.1.1 to 24.1.9		P
	For components mentioned in 24.1.1 to 24.1.9 no additional tests specified in the relevant component standard are necessary other than those specified in 24.1.1 to 24.1.9		P

IEC 60335-2-9			
Clause	Clause	Clause	Clause
	Components not tested and found to comply with relevant IEC standard and components not marked or not used in accordance with its marking, tested under the conditions occurring in the appliance		P
	Lampholders and starterholders that have not being tested and found to comply with the relevant IEC standard, tested as a part of the appliance and additionally according to the gauging and interchangeability requirements of the relevant IEC standard		N/A
	No additional tests specified for nationally standardized plugs such as those detailed in IEC/TR 60083 or connectors complying with the standard sheets of IEC 60320-1 and IEC 60309		P
24.1.1	Capacitors likely to be permanently subjected to the supply voltage and used for radio interference suppression or for voltage dividing, complying with IEC 60384-14	Certified component	P
	If the capacitors have to be tested, they are tested according to Annex F		N/A
24.1.3	Switches complying with IEC 61058-1, the number of cycles of operation being at least 10 000	Certified component	P
	If they have to be tested, they are tested according to Annex H		N/A
	If the switch operates a relay or contactor, the complete switching system is subjected to the test		N/A
	If the switch only operates a motor starting relay complying with IEC 60730-2-10 with the number of cycles of a least 10 000 as specified, the complete switching system need not be tested		N/A
	Switches controlling heating elements of hotplates subjected to 50000 cycles of operation (IEC 60335-2-9)		N/A
24.1.4	Automatic controls complying with IEC 60730-1 with the relevant part 2. The number of cycles of operation being at least:		
	- thermostats: 10 000	Certified	P
	- temperature limiters: 1 000		N/A
	- self-resetting thermal cut-outs: 300		N/A
	- voltage maintained non-self-resetting thermal cut-outs: 1 000		N/A
	- other non-self-resetting thermal cut-outs: 30		N/A
	- timers: 3 000	Certified	P

IEC 60335-2-9			
Clause	Clause	Clause	Clause
	- energy regulators: 10 000		N/A
	- energy regulators for automatic action (IEC 60335-2-9): 100 000		N/A
	- energy regulators for manual action (IEC 60335-2-9): 10 000		N/A
	Self-resetting thermal cut-outs for heating elements of glass-ceramic hotplates (IEC 60335-2-9) 100 000		N/A
	The number of cycles for controls operating during clause 11 need not be declared, if the appliance meets the requirements of this standard when they are short-circuited		N/A
	Thermal motor protectors are tested in combination with their motor under the conditions specified in Annex D		N/A
	For water valves containing live parts and that are incorporated in external hoses for connection of an appliance to the water mains, the degree of protection declared for subclause 6.5.2 of IEC 60730-2-8 is IPX7		N/A
24.1.8	The relevant standard for thermal links is IEC 60691		P
	Thermal links not complying with IEC 60691 are considered to be an intentionally weak part for the purposes of Clause 19		N/A
24.1.9	Contactors and relays, other than motor starting relays, tested as part of the appliance	Certified component 10000 Cycles	P
	They are also tested in accordance with Clause 17 of IEC 60730-1, the number of cycles of operations in 24.1.4 selected according to the contactor or relay function in the appliance		P
24.2	Appliances not fitted with:		
	- switches or automatic controls in flexible cords		P
	- devices causing the protective device in the fixed wiring to operate in the event of a fault in the appliance		P
	- thermal cut-outs that can be reset by soldering, unless		P
	the solder has a melting point of at least 230 °C		N/A

IEC 60335-2-9			
Clause	Clause	Clause	Clause
24.101	Thermostats and energy regulators incorporating an off position: off position maintained under test conditions (IEC 60335-2-9)		P
	Thermostats and energy regulators incorporating an off position : no breakdown after application of 500V across the contacts not switch on as a result of variations in ambient temperature (IEC 60335-2-9)		P
25	SUPPLY CONNECTION AND EXTERNAL FLEXIBLE CORDS		
25.1	Appliance not intended for permanent connection to fixed wiring, means for connection to the supply:		
	- supply cord fitted with a plug,		P
	- an appliance inlet having at least the same degree of protection against moisture as required for the appliance, or		N/A
	- pins for insertion into socket-outlets		N/A
	Appliances incorporating an appliance inlet other than those standardized in IEC 60320-1, shall be supplied with a cord set (IEC 60335-2-9)		N/A
25.2	Appliance not provided with more than one means of connection to the supply mains		P
	Stationary appliance for multiple supply may be provided with more than one means of connection, provided electric strength test of 1250 V for 1 min between each means of connection causes no breakdown		N/A
25.5	Method for assembling the supply cord to the appliance:		
	- type X attachment		N/A
	- type Y attachment		P
	- type Z attachment, if allowed in relevant part 2		N/A
	Type X attachment, other than those with a specially prepared cord, not used for flat twin tinsel cords		N/A
	For multi-phase appliances supplied with a supply cord and that are intended to be permanently connected to fixed wiring, the supply cord is assembled to the appliance by type Y attachment		N/A
25.6	Plugs fitted with only one flexible cord		P
25.7	Supply cords, other than for class III appliances, being one of the following types:		
	- rubber sheathed (at least 60245 IEC 53)	H05RR-F	P
	- polychloroprene sheathed (at least 60245 IEC 57)	H05RN-F	P

IEC 60335-2-9			
Clause	Clause	Clause	Clause
	- cross-linked polyvinyl chloride sheathed (at least 60245 IEC 88)		N/A
	- polyvinyl chloride sheathed. Not used if they are likely to touch metal parts having a temperature rise exceeding 75 K during the test of clause 11		
	<ul style="list-style-type: none"> light polyvinyl chloride sheathed cord (60227 IEC 52), for appliances not exceeding 3 kg 		N/A
	<ul style="list-style-type: none"> ordinary polyvinyl chloride sheathed cord (60227 IEC 53), for other appliances 	H05VV-F	P
	- heat resistant polyvinyl chloride sheathed. Not used for type X attachment other than specially prepared cords		
	<ul style="list-style-type: none"> heat-resistant light polyvinyl chloride sheathed cord (60227 IEC 56), for appliances not exceeding 3 kg 		N/A
	<ul style="list-style-type: none"> heat-resistant polyvinyl chloride sheathed cord (60227 IEC 57), for other appliances 		N/A
	Supply cords for class III appliances adequately insulated		N/A
	Test with 500 V for 2 min for supply cords of class III appliances that contain live parts		N/A
25.8	Nominal cross-sectional area of supply cords not less than table 11; rated current (A); cross-sectional area (mm ²)	Max <10A, 3x0,75mm ² (Length ≤ 2m) or 3x1,0mm ²	P
25.9	Supply cords not in contact with sharp points or edges		P
25.10	Supply cord of class I appliances have a green/yellow core for earthing		P
25.11	Conductors of supply cords not consolidated by soldering where they are subject to contact pressure, unless		P
	the contact pressure is provided by spring terminals		N/A
25.13	Inlet openings so constructed as to prevent damage to the supply cord		P
	If the enclosure at the inlet opening is not of insulating material, a non-detachable lining or bushing complying with 29.3 for supplementary insulation provided		N/A
	If unsheathed supply cord, a similar additional bushing or lining is required, unless the appliance is		N/A
	class 0, or		N/A
	a class III appliance not containing live parts		N/A

IEC 60335-2-9			
Clause	Clause	Clause	Clause
25.15	For appliances with supply cord and appliances to be permanently connected to fixed wiring by a flexible cord, conductors of the supply cord relieved from strain, twisting and abrasion by use of cord anchorage		P
	The cord cannot be pushed into the appliance to such an extent that the cord or internal parts of the appliance can be damaged		P
	Pull and torque test of supply cord, values shown in table 12: mass (kg); pull (N); torque (not on automatic cord reel) (Nm)..... :	Max 4,9kg, 100N, 0,35Nm	P
	Cord not damaged and max. 2 mm displacement of the cord	Max 1,2mm	P
25.17	Adequate cord anchorages for type Y and Z attachment, test with the cord supplied with the appliance	Type Y	P
25.18	Cord anchorages only accessible with the aid of a tool, or		P
	Constructed so that the cord can only be fitted with the aid of a tool		P
25.20	The insulated conductors of the supply cord for type Y and Z attachment additionally insulated from accessible metal parts	Type Y	P
27	PROVISION FOR EARTHING		
27.1	Accessible metal parts of Class 0I and I appliances permanently and reliably connected to an earthing terminal or earthing contact of the appliance inlet		P
	Earthing terminals and earthing contacts not connected to the neutral terminal		P
	Class 0, II and III appliances have no provision for earthing		N/A
	Safety extra-low voltage circuits not earthed, unless		N/A
	protective extra-low voltage circuits		N/A
	No earthing via flexible metal tubes, coiled springs and cord anchorage (IEC 60335-2-9)		N/A
27.2	Clamping means of earthing terminals adequately secured against accidental loosening		P
	Terminals for the connection of external equipotential bonding conductors allow connection of conductors of 2.5 to 6 mm ² , and		N/A
	do not provide earthing continuity between different parts of the appliance, and		P

IEC 60335-2-9			
Clause	Clause	Clause	Clause
	conductors cannot be loosened without the aid of a tool		P
27.3	For a detachable part having an earth connection and being plugged into another part of the appliance, the earth connection is made before and separated after current-carrying connections when removing the part		N/A
	For appliances with supply cords, current-carrying conductors become taut before earthing conductor, if the cord slips out of the cord anchorage		P
27.4	No risk of corrosion resulting from contact between parts of the earthing terminal and the copper of the earthing conductor or other metal		P
	Parts providing earthing continuity, other than parts of a metal frame or enclosure, have adequate resistance to corrosion		P
	If of steel, these parts provided with an electroplated coating with a thickness at least 5 µm		P
	Adequate protection against rusting of parts of coated or uncoated steel, only intended to provide or transmit contact pressure		P
	In the body of the earthing terminal is a part of a frame or enclosure of aluminium or aluminium alloys, precautions taken to avoid risk of corrosion		P
27.5	Low resistance of connection between earthing terminal and earthed metal parts		P
	This requirement does not apply to connections providing earthing continuity in the protective extra-low voltage circuit, provided the clearances of basic insulation are based on the rated voltage of the appliance		N/A
	Resistance not exceeding 0,1 Ω at the specified low-resistance test (Ω)	Max 0,02 Ω	P

	ANNEX EN 62233:2008		
	EMF- ELECTROMAGNETICS FIELDS		
	The tested product also complies with the requirements of EN 62233:2008		
	Limit100%	Measured max.: 0,893uT	P

IEC 60335-2-9			
Clause	Requirement + Test	Result - Remark	Verdict

10.1	TABLE: Power input deviation					P
Input deviation of/at:	P rated (W)	P measured (W)	ΔP	Required ΔP	Remark	
AF-051	1000	950	-5,0%	-10% ~ +5%	Tested at 230V	
AF-005, AF-005-1, AF-005A, AF-005A-1	1700	1600	-5,9%	-10% ~ +5%	Tested at 230V	

11.8	TABLE: Heating test (for AF-051)			P
	Test voltage (V).....:	1252W, 264V		—
	Ambient (°C).....:	23		—
Thermocouple locations		Max. temperature rise measured, ΔT (K)	Max. temperature rise limit, ΔT (K)	
Supply cord		31	50	
Internal wire		99	155(T-25)	
Interlock switch		38	60(T-25)	
Wire connector		33	--	
Ambient of Non-adjustable thermostat		121	225(T-25)	
Ambient of timer		58	95(T-25)	
Knob surface		22	60	
Insulation of thermal link		133	--	
External enclosure		53	--	
Top cover		27	--	
Handle of basket		16	60	
Internal enclosure		82	--	
Centre of container		172	--	
Air outlet grilles		78	--	
Wooden support		60	65	

11.8	TABLE: Heating test, resistance method (for AF-051)			P
	Test voltage (V).....:	264V		—
	Ambient, t1 (°C).....:	23		—
	Ambient, t2 (°C).....:	23		—

IEC 60335-2-9			
Clause	Requirement + Test	Result - Remark	Verdict

Temperature rise of winding	R1 (Ω)	R2 (Ω)	Δ T (K)	Max. Δ T (K)	Insulation class
Motor (YJ58-16)	526,30	770,80	120	140	Class 180

EK1-AG2 11.Z105	TABLE: Heating test (for AF-051)		P
	Test voltage (V)	1089W, 246V	—
	Ambient (°C)	23	—
Thermocouple locations		Max. temperature rise measured, Δ T (K)	Max. temperature rise limit, Δ T (K)
Bare metal		--	45
Coated metal		--	55
Glass and ceramic		--	60
Plastic and plastic coating > 0,3mm		51	65

11.8	TABLE: Heating test (for AF-005A with YJ61-20)		P
	Test voltage (V).....	2129W, 265V	—
	Ambient (°C).....	23	—
Thermocouple locations		Max. temperature rise measured, Δ T (K)	Max. temperature rise limit, Δ T (K)
Supply cord		44	50
Internal wire		126	155(T-25)
Interlock switch		48	60(T-25)
Wire connector		50	--
Insulation of thermal link		135	--
Relay		40	60(T-25)
Varistor		35	60(T-25)
X2 capacitor		38	75(T-25)
PCB		40	120
Relay (for AF-005A-1)		49	60(T-25)
Varistor (for AF-005A-1)		48	60(T-25)
X2 capacitor (for AF-005A-1)		44	75(T-25)
PCB (for AF-005A-1)		53	120
PCB holder		34	--

IEC 60335-2-9			
Clause	Requirement + Test	Result - Remark	Verdict
Control panel		21	60
Handle of basket		28	60
External enclosure plastic		91	--
Internal enclosure		130	--
Centre of container		153	--
Air outlet grilles		105	--
Wooden support		51	65

11.8	TABLE: Heating test, resistance method (for AF-005A)					P
	Test voltage (V)				265V	—
	Ambient, t1 (°C)				23	—
	Ambient, t2 (°C)				23	—
Temperature rise of winding	R1 (Ω)	R2 (Ω)	Δ T (K)	Max. Δ T (K)	Insulation class	
Motor (YJ61-20)	206,22	277,89	90	140	Class 180	

EK1-AG2 11.Z105	TABLE: Heating test (for AF-005A)			P	
	Test voltage (V)			1851W, 247V	—
	Ambient (°C)			23	—
Thermocouple locations	Max. temperature rise measured, Δ T (K)		Max. temperature rise limit, Δ T (K)		
Bare metal	--		45		
Coated metal	--		55		
Glass and ceramic	--		60		
Plastic and plastic coating > 0,3mm	59		65		

11.8	TABLE: Heating test (for AF-005 with YJ61-20)			P	
	Test voltage (V)			2129W, 265V	—
	Ambient (°C)			23	—
Thermocouple locations	Max. temperature rise measured, Δ T (K)		Max. temperature rise limit, Δ T (K)		
Supply cord	36		50		
Ambient of thermostat	49		100(T-25)		

IEC 60335-2-9			
Clause	Requirement + Test	Result - Remark	Verdict
Ambient of timer		50	95(T-25)
Ambient of Non-self-resetting thermal cut out		120	255(T-25)
External enclosure plastic		92	--
Internal enclosure		110	--
Centre of container		159	--
Air outlet grilles		105	--
Wooden support		59	65

13.2	TABLE: Leakage current		P
	Heating appliances: 1.15 x rated input (W)....:	Same as Cl.11.4	—
	Motor-operated and combined appliances: 1.06 x rated voltage (V).....:	N/A	—
Leakage current between		I (Ma)	Max. allowed I (Ma)
L/N — Earthing metal parts		Max 0,16	0,75
L/N — Enclosure (with metal foil or ungrounded metal parts)		Max 0,02 peak	0,35 peak
L/N — Knob/handle		Max 0,02 peak	0,35 peak

13.3	TABLE: Dielectric strength		P
Test voltage applied between:		Test potential applied (V)	Breakdown / flashover (Yes/No)
Parts isolated with basic insulation		1000	No
Parts isolated with supplementary insulation		1750	No
Parts isolated with reinforced insulation		3000	No

16.2	TABLE: Leakage current (for all models)		P
	Single phase appliances: 1.06 x rated voltage (V).....:	254,4V	—
	Three phase appliances 1.06 x rated voltage divided by $\sqrt{3}$ (V).....:	N/A	—
Leakage current between		I (Ma)	Max. allowed I (Ma)
L/N — Earthing metal parts		Max 0,13	0,75
L/N — Enclosure (with metal foil or ungrounded metal parts)		Max 0,02	0,25
L/N — Knob/handle		Max 0,02	0,25

IEC 60335-2-9			
Clause	Requirement + Test	Result - Remark	Verdict

16.3	TABLE: Dielectric strength (for all models)		P
Test voltage applied between:		Test potential applied (V)	Breakdown / flashover (Yes/No)
Parts isolated with basic insulation		1250	No
Parts isolated with supplementary insulation		1750	No
Parts isolated with reinforced insulation		3000	No

19	Abnormal operation conditions		P
Operational characteristics		YES/NO	Operational conditions
Are there electronic circuits to control the appliance operation?		YES	For electronic control models: Test at 240V
Are there “off” or “stand-by” position?		YES	For electronic control models: “stand-by” Test at 240V
The unintended operation of the appliance results in dangerous malfunction?		No	--

Sub-clause	Operating conditions description	Test results description	PEC description	EMP 19.11.4	Software type required	19.11.3 PEC	Final result
19.2	Refer to clasue19.2	No hazard	N/A	N/A	N/A	N/A	P
19.3	Refer to clasue19.3	No hazard	N/A	N/A	N/A	N/A	P
19.4	Refer to clasue19.4	No hazard	N/A	N/A	N/A	N/A	P
19.5	Refer to clasue19.5	No hazard	N/A	N/A	N/A	N/A	P
19.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A
19.7	Refer to clasue19.7	N/A	N/A	N/A	N/A	N/A	P
19.8	N/A	N/A	N/A	N/A	N/A	N/A	N/A
19.9	N/A	N/A	N/A	N/A	N/A	N/A	N/A
19.10	N/A	N/A	N/A	N/A	N/A	N/A	N/A
19.11.2	Refer to clasue19.11	No hazard	N/A	N/A	N/A	N/A	P
19.11.4.8	Refer to Cl.19.11.4.8	No hazard	N/A	N/A	N/A	N/A	P
19.10X	N/A	N/A	N/A	N/A	N/A	N/A	N/A

IEC 60335-2-9			
Clause	Requirement + Test	Result - Remark	Verdict

19.7	TABLE: Abnormal operation, locked rotor/moving parts (for AF-051)					P
	Test voltage (V)..... :				240	—
	Ambient, t1 (°C)				23	—
	Ambient, t2 (°C)				23	—
Temperature of winding		R1 (Ω)	R2 (Ω)	Δ T (K)	T (°C)	Max. T (°C)
Motor (YJ58-16)		--	--	--	230	260
Supplementary information: 41 min 01 second. the thermal link for motor opened.						

19.7	TABLE: Abnormal operation, locked rotor/moving parts (for AF-005A)					P
	Test voltage (V)..... :				240	—
	Ambient, t1 (°C)				23	—
	Ambient, t2 (°C)				23	—
Temperature of winding		R1 (Ω)	R2 (Ω)	Δ T (K)	T (°C)	Max. T (°C)
Motor (YJ61-20)		--	--	--	163	260
Supplementary information: 11 min 03 second. the thermal link for motor opened.						

19.13	TABLE: Abnormal operation, temperature rises (for AF-051)			P
Thermocouple locations	Max. temperature rise measured, Δ T (K)		Max. temperature rise limit, Δ T (K)	
	19.2, 19.3	19.4		
Supply cord	37	47	150	
Test corner	64	73	150	
External enclosure plastic	59	--	For Cl.30	
Internal enclosure	88	--	For Cl.30	
Supplementary information:				

19.13	TABLE: Abnormal operation, temperature rises (for AF-005A)			P
Thermocouple locations	Max. temperature rise measured, Δ T (K)		Max. temperature rise limit, Δ T (K)	
	19.2, 19.3	19.4		
Supply cord	55	61	150	
Test corner	62	68	150	
External enclosure plastic	103	--	For Cl.30	
Internal enclosure	141	--	For Cl.30	
Supplementary information:				

IEC 60335-2-9			
Clause	Requirement + Test	Result - Remark	Verdict

24.1	TABLE: Critical components information					P
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹	
Plug	Yuyao Jingyi Electronics Co., Ltd.	JY03-F	250V~, 16A DIN 49441-R2	DIN VDE 0620-1	VDE*/ 40020796	
Alternative	Yuyao Jingyi Electronics Co., Ltd.	JY-03	250V~, 16A DIN 49441-R2	DIN VDE 0620-1	VDE*/ 40010586	
Alternative	Yuyao Chongyu Electric Co., Ltd.	CY-03	250V~, 16A DIN 49441-R2	DIN VDE 0620-1	VDE*/ 40035562	
Alternative	Ningbo Jiajie Electronic Co., Ltd.	JF-03	250V~, 16A DIN 49441-R2	DIN VDE 0620-1	VDE*/ 40030700	
Alternative	Ningbo Jiajie Electronic Co., Ltd.	JF-03F	250V~, 16A DIN 49441-R2	DIN VDE 0620-1	VDE*/ 40035038	
Alternative	CIXI SHANGEN CAR PARTS CO.,LTD	XM-3	250V~, 16A DIN 49441-R2	DIN VDE 0620-1	VDE*/ 40005129	
Alternative	Ningbo JinTing Nuclear Cable Co., Ltd	FY003	250V~, 16A DIN 49441-R2	DIN VDE 0620-1	VDE*/ 40036474	
Alternative	Ningbo Liansheng Wire & Cable Co., Ltd.	LS03	250V~, 16A DIN 49441-R2	DIN VDE 0620-1	VDE*/ 40034732	
Alternative	Cixi Yelei Electron Co., Ltd.	YL-03F	250V~, 16A DIN 49441-R2	DIN VDE 0620-1	VDE*/ 40052523	
Alternative	Cixi Yelei Electron Co., Ltd.	YL-03	250V~, 16A DIN 49441-R2	DIN VDE 0620-1	VDE*/ 40052989	
Alternative	NINGBO XUANHUA ELECTRIC CO. LTD	XH-03	250V~, 16A DIN 49441-R2	DIN VDE 0620-1	VDE*/ 40019691	
Plug only for U.K.	Zhejiang Jinting Nuclear Cable Co., Ltd	JT006A	250V~	BS 1363-1	ASTA*/ 1120	
Alternative	Ningbo Qiaopu Electric Co., Ltd.	D09, D09A	250V~	BS 1363-1	ASTA*/ 930	

IEC 60335-2-9					
Clause	Requirement + Test			Result - Remark	Verdict
Alternative	Yuyao City Dongdong Electrical Appliance Factory	Y006, Y006-A	250V~	BS 1363-1	ASTA*/1199
Alternative	Ningbo Jinting Nuclear Cable Co., Ltd.	FY006A	250V~	BS 1363-1	ASTA*/1295
Alternative	Cixi Yelei Electron Co., Ltd.	YL09	250V~	BS 1363-1	ASTA*/1429
Alternative	Ningbo Xuanhua Electric Appliance Co., Ltd	XH031B XH031C	250V~	BS 1363-1	ASTA*/1118
Remark: The rating of BS fuse-links should be employed according to the table2 of BS 1363-1:2016+A1:2018					
Swiss plug	Ningbo Qiaopu Electric Co., Ltd.	D13	250V~, 10A L+N+PE	SEV 6534-2	SEV*/20.0781
Alternative	Shangyu Jintao Electron Co., Ltd.	R3-10	250V~, 10A L+N+PE	SEV 6534-2	SEV*/21.0057
Power cord	Yuyao Chongyu Electric Co., Ltd.	H05VV-F	3G0,75 mm ² (length≤2 m) or 3G1,0 mm ²	EN 50525-2-11	VDE*/40034858
Alternative	Ningbo Jiajie Electronic Co., Ltd.	H05VV-F	3G0,75 mm ² (length≤2 m) or 3G1,0 mm ²	EN 50525-2-11	VDE*/40028223
Alternative	CIXI SHANGEN CAR PARTS CO.,LTD	H05VV-F	3G0,75 mm ² (length≤2 m) or 3G1,0 mm ²	EN 50525-2-11	VDE*/138127
Alternative	Ningbo Liansheng Wire & Cable Co., Ltd.	H05VV-F	3G0,75 mm ² (length≤2 m) or 3G1,0 mm ²	EN 50525-2-11	VDE*/40022054
Alternative	Ningbo Jinting Nuclear Cable Co., Ltd.	H05VV-F	3G0,75 mm ² (length≤2 m) or 3G1,0 mm ²	EN 50525-2-11	VDE*/40033767
Alternative	Cixi Yelei Electron Co., Ltd.	H05VV-F	3G0,75 mm ² (length≤2 m) or 3G1,0 mm ²	EN 50525-2-11	VDE*/40052058
Alternative	Ningbo Xuanhua Electric Co., Ltd.	H05VV-F	3G0,75 mm ² (length≤2 m) or 3G1,0 mm ²	EN 50525-2-11	VDE*/40047946
Alternative	Ningbo Liansheng Wire & Cable Co., Ltd.	H05RR-F H05RN-F	3G0,75 mm ² (length≤2 m) or 3G1,0 mm ²	EN 50525-2-21	VDE*/40033764

IEC 60335-2-9					
Clause	Requirement + Test			Result - Remark	Verdict
Alternative	CIXI SHANGEN CAR PARTS CO.,LTD	H05RR-F H05RN-F	3G0,75 mm ² (length≤2 m) or 3G1,0 mm ²	EN 50525-2-21	VDE*/ 40026384
Alternative	Ningbo Jinting Nuclear Cable Co., Ltd.	H05RR-F H05RN-F	3G0,75 mm ² (length≤2 m) or 3G1,0 mm ²	EN 50525-2-21	VDE*/ 40032177
Alternative	Cixi Yelei Electron Co., Ltd.	H05RR-F H05RN-F	3G0,75 mm ² (length≤2 m) or 3G1,0 mm ²	EN 50525-2-21	VDE*/ 40052013
Alternative	NINGBO XUANHUA ELECTRIC CO. LTD	H05RR-F H05RN-F	3G0,75 mm ² (length≤2 m) or 3G1,0 mm ²	EN 50525-2-21	VDE*/ 40036306
Timer for AF-001, AF-002, AF-005, AF-005- 1, AF-006, AF- 006D, AF-009, AF-010, AF-012, AF-015, AF-016, AF-001B, AF- 022, AF-051	Jiangsu Shalong Mechanical & Electrical Technology Co., Ltd.	SL-30B SL-30B1	250V~, 15A, 1E4, T120	EN 60730-1 EN 60730-2-7	TUV*/ R 50024942
Alternative	Jiangsu Shalong Mechanical & Electrical Technology Co., Ltd.	SL-60C SL-60C1	250V~, 15A, 1E4, T125	EN 60730-1 EN 60730-2-7	TUV*/ R 50024942
Alternative	HANGZHOU GUANZUAN ELECTRICAL APPLIANCE CO., LTD.	DKJ/1-30 DKJ/1-60	250V~, 16A, 1E4, T125	EN 60730-1 EN 60730-2-7	VDE*/ 126656
Alternative	Hangzhou Tianma Time-control Si- Tech Co., Ltd..	DKJ-Y-30 DKJ-Y-60	250V~, 16A, 1E4, T125	EN 60730-1 EN 60730-2-7	TUV*/ R 50192052
Alternative	Jiangsu Shalong Mechanical & Electrical Technology Co., Ltd.	SLS-30 SLS-60	250V~, 16A, 1E4, T125	EN 60730-1 EN 60730-2-7	TUV*/ R 50024942
Interlock switch	Cixi Xunma Electronic Technology Co., Ltd.	KW3-OZ	250V~, 16A, 1E4, T85	EN 61058-1	TUV*/ R 50192335

IEC 60335-2-9					
Clause	Requirement + Test			Result - Remark	Verdict
Alternative	Siber(China) Electric Mfg. Limited	SB1-16	250V~,16(4)A, 1E4, T105	EN 61058-1	TUV SUD*/B 093102 0004 Rev. 01
Alternative	Zhejiang Chuangye Electronics Co., Ltd.	KW11	250V~, 16(10) A, 5E4, T125	EN 61058-1	TUV*/ R 50199565
Alternative	Yue Qing Luster Electronics Co., Ltd.	V1	250V~, 16(4) A, 5E4, T125	EN 61058-1	DEKRA*/ 2145670.02
Alternative	Zhongshan Jufond Electric Appliance Co., Ltd.	SW315	250V~, 16(2) A, 1E5, T125	EN 61058-1	TUV*/ R 50112960
Alternative	DONGNAN ELECTRONICS CO., LTD.	KW3AT-16	250V~,16(4) A, 10E3, T125	EN 61058-1	VDE*/ 40011294
Alternative	Yueqing Tongda Wire Electric Factory	HK-14	250V~,16(3) A, 5E4, T125	EN 61058-1	VDE*/ 40027032
Alternative	Zhejiang Yuyang Technology Co., Ltd.	LF-20	250V~, 16(10) A, 5E4, T125	EN 61058-1	TUV*/ R 50306508
Alternative	Zhongshan Chuancheng Precision Electronics Co., Ltd.	CCY-AQS	250VAC, 16(6)A, T125, 1E5	EN 61058-1	VDE*/ 40055188
Thermostat for AF-001	WUXI RUNYE ELECTRICAL APPLIANCE CO.,LTD.	WRC200-714	250V~,16A, Tf200°C, T150, 1E5	EN 60730-1 EN 60730-2-9	TUV*/ R 50294444
Alternative	Foshan City Jiulong Machine Co., Ltd.	WY200-651-21T3	250V~,16A, Tf200°C, T125, 1E5	EN 60730-1 EN 60730-2-9	VDE*/ 40020065
Alternative	Zhongshan City Zhongheng Electronics Co., Ltd.	WYE-200-0116	250V~,16A, Tf200°C, T125, 1E5	EN 60730-1 EN 60730-2-9	TUV*/ R 50139037
Alternative	Anhui Huide Electronic Technology Co., Ltd.	KST-118	250V~,16A, Tf200°C, T125, 1E5	EN 60730-1 EN 60730-2-9	TUV*/ R 50479194

IEC 60335-2-9					
Clause	Requirement + Test			Result - Remark	Verdict
Alternative	Changzhou Thermoster Electrical Heating Appliance Co., Ltd	KST200A-01	250V~,16A, Tf200°C, T150, 1E5	EN 60730-1 EN 60730-2-9	TUV SUD*/B 115324 0001 Rev. 01
Alternative	Changzhou HDV Electrical Appliance Co., Ltd	KST200	250V~ 16A Tf200°C T150, 1E5	EN 60730-1 EN 60730-2-9	TUV SUD*/B 114136 0001 Rev. 00
Thermostat for AF-002	Zhongshan City Zhongheng Electronics Co., Ltd.	WYE-170-0116	250V~,16A, Tf170°C, T125, 1E5	EN 60730-1 EN 60730-2-9	TUV*/ R 50139037
Alternative	WUXI RUNYE ELECTRICAL APPLIANCE CO.,LTD.	WRC170-714	250V~,16A, Tf170°C, T150, 1E5	EN 60730-1 EN 60730-2-9	TUV*/ R 50294444
Alternative	Foshan City Jiulong Machine Co., Ltd.	WY170-651-21T3	250V~,16A, Tf170°C, T125, 1E5	EN 60730-1 EN 60730-2-9	VDE*/ 40020065
Alternative	Anhui Huide Electronic Technology Co., Ltd.	KST-118	250V~,16A, Tf170°C, T125, 1E5	EN 60730-1 EN 60730-2-9	TUV*/ R 50479194
Alternative	Changzhou Thermoster Electrical Heating Appliance Co., Ltd	KST170A-01	250V~,16A, Tf170°C, T150, 1E5	EN 60730-1 EN 60730-2-9	TUV SUD*/B 115324 0001 Rev. 01
Alternative	Changzhou HDV Electrical Appliance Co., Ltd	KST170	250V~ 16A Tf170°C T150, 1E5	EN 60730-1 EN 60730-2-9	TUV SUD*/B 114136 0001 Rev. 00
Thermostat for AF-005, AF-005-1	WUXI RUNYE ELECTRICAL APPLIANCE CO.,LTD.	WRC185-714	250V~,16A, Tf185°C, T150, 1E5	EN 60730-1 EN 60730-2-9	TUV*/ R 50294444
Alternative	Foshan City Jiulong Machine Co., Ltd.	WY185-651-21T3	250V~,16A, Tf185°C, T125, 1E5	EN 60730-1 EN 60730-2-9	VDE*/ 40020065
Alternative	Zhongshan City Zhongheng Electronics Co., Ltd.	WYE-185-0116	250V~,16A, Tf185°C, T125, 1E5	EN 60730-1 EN 60730-2-9	TUV*/ R 50139037

IEC 60335-2-9					
Clause	Requirement + Test			Result - Remark	Verdict
Alternative	Anhui Huide Electronic Technology Co., Ltd.	KST-118	250V~,16A, Tf185°C, T125, 1E5	EN 60730-1 EN 60730-2-9	TUV*/ R 50479194
Alternative	Changzhou Thermoster Electrical Heating Appliance Co., Ltd	KST185A-01	250V~,16A, Tf185°C, T150, 1E5	EN 60730-1 EN 60730-2-9	TUV SUD*/B 115324 0001 Rev. 01
Alternative	Changzhou HDV Electrical Appliance Co., Ltd	KST185	250V~ 16A Tf185°C T150, 1E5	EN 60730-1 EN 60730-2-9	TUV SUD*/B 114136 0001 Rev. 00
Thermostat for AF-006, AF-006D, AF-015,	Zhongshan City Zhongheng Electronics Co., Ltd.	WYE-165-0009	250V~,16A, Tf165°C, T125, 1E5	EN 60730-1 EN 60730-2-9	TUV*/ R 50139037
Alternative	WUXI RUNYE ELECTRICAL APPLIANCE CO.,LTD.	WRC165-714	250V~,16A, Tf165°C, T150, 1E5	EN 60730-1 EN 60730-2-9	TUV*/ R 50294444
Alternative	Foshan City Jiulong Machine Co., Ltd.	WY165-651-21T3	250V~,16A, Tf165°C, T125, 1E5	EN 60730-1 EN 60730-2-9	VDE*/ 40020065
Alternative	Anhui Huide Electronic Technology Co., Ltd.	KST-118	250V~,16A, Tf165°C, T125, 1E5	EN 60730-1 EN 60730-2-9	TUV*/ R 50479194
Alternative	Changzhou Thermoster Electrical Heating Appliance Co., Ltd	KST165A-01	250V~,16A, Tf165°C, T150, 1E5	EN 60730-1 EN 60730-2-9	TUV SUD*/B 115324 0001 Rev. 01
Alternative	Changzhou HDV Electrical Appliance Co., Ltd	KST165	250V~ 16A Tf165°C T150, 1E5	EN 60730-1 EN 60730-2-9	TUV SUD*/B 114136 0001 Rev. 00
Thermostat for AF-009	WUXI RUNYE ELECTRICAL APPLIANCE CO.,LTD.	WRC175-714	250V~,16A, Tf175°C, T150, 1E5	EN 60730-1 EN 60730-2-9	TUV*/ R 50294444
Alternative	Foshan City Jiulong Machine Co., Ltd.	WY175-651-21T3	250V~,16A, Tf175°C, T125, 1E5	EN 60730-1 EN 60730-2-9	VDE*/ 40020065

IEC 60335-2-9					
Clause	Requirement + Test			Result - Remark	Verdict
Alternative	Zhongshan City Zhongheng Electronics Co., Ltd.	WYE-175-0009	250V~,16A, Tf175°C, T125, 1E5	EN 60730-1 EN 60730-2-9	TUV*/ R 50139037
Alternative	Anhui Huide Electronic Technology Co., Ltd.	KST-118	250V~,16A, Tf175°C, T125, 1E5	EN 60730-1 EN 60730-2-9	TUV*/ R 50479194
Alternative	Changzhou Thermoster Electrical Heating Appliance Co., Ltd	KST175A-01	250V~,16A, Tf175°C, T150, 1E5	EN 60730-1 EN 60730-2-9	TUV SUD*/B 115324 0001 Rev. 01
Alternative	Changzhou HDV Electrical Appliance Co., Ltd	KST175	250V~ 16A Tf175°C T150, 1E5	EN 60730-1 EN 60730-2-9	TUV SUD*/B 114136 0001 Rev. 00
Thermostat for AF-010, AF-012, AF-016, AF-022	WUXI RUNYE ELECTRICAL APPLIANCE CO.,LTD.	WRC180-714	250V~,16A, Tf180°C, T150, 1E5	EN 60730-1 EN 60730-2-9	TUV*/ R 50294444
Alternative	Foshan City Jiulong Machine Co., Ltd.	WY180-651-21T3	250V~,16A, Tf180°C, T125, 1E5	EN 60730-1 EN 60730-2-9	VDE*/ 40020065
Alternative	Zhongshan City Zhongheng Electronics Co., Ltd.	WYE-180-0009	250V~,16A, Tf180°C, T125, 1E5	EN 60730-1 EN 60730-2-9	TUV*/ R 50139037
Alternative	Anhui Huide Electronic Technology Co., Ltd.	KST-118	250V~,16A, Tf180°C, T125, 1E5	EN 60730-1 EN 60730-2-9	TUV*/ R 50479194
Alternative	Changzhou Thermoster Electrical Heating Appliance Co., Ltd	KST180A-01	250V~,16A, Tf180°C, T150, 1E5	EN 60730-1 EN 60730-2-9	TUV SUD*/B 115324 0001 Rev. 01
Alternative	Changzhou HDV Electrical Appliance Co., Ltd	KST180	250V~ 16A Tf180°C T150, 1E5	EN 60730-1 EN 60730-2-9	TUV SUD*/B 114136 0001 Rev. 00
Non-adjustable thermostat for AF-001B	Nanjing Shao Di Electronic Co., Ltd.	KSD302	250V~ 10A, 1E4 , Tf175°C, T250	EN 60730-1 EN 60730-2-9	TUV*/ R 50219800

IEC 60335-2-9					
Clause	Requirement + Test		Result - Remark		Verdict
Alternative	Ningbo Tongbao Huashuo Temp.Controller Co., Ltd	KSD301-G	250V~ 10A, 1E5 , Tf175°C, T280	EN 60730-1 EN 60730-2-9	TUV*/ R 50205557
Non-adjustable thermostat for AF-051	Nanjing Shao Di Electronic Co., Ltd.	KSD302	250V~ 10A, 1E4 , Tf155°C, T250	EN 60730-1 EN 60730-2-9	TUV*/ R 50219800
Alternative	Ningbo Tongbao Huashuo Temp.Controller Co., Ltd	KSD301-G	250V~ 10A, 1E5 , Tf155°C, T280	EN 60730-1 EN 60730-2-9	TUV*/ R 50205557
Internal wire	Cixi Shuanghong Wire Co., Ltd.	H05S-K, H05SJ-K	0,5 mm ² for indicator, 0,75-1,0 mm ² for others, T180	EN 50525-2-41	VDE*/ 40017324
Alternative	Cixi Jiangyuan Power Cord Co., Ltd.	H05S-K, H05SJ-K	0,5 mm ² for indicator, 0,75-1,0 mm ² for others, T180	EN 50525-2-41	VDE*/ 40031080
Alternative	CIXI SHUANGHONG WIRE CO LTD	3122	22-26 AWG for indicator, 16-20 AWG for others, 300VAC, 200°C (E333296)	EN 60335-2-9 EN 60335-1	Tested with appliance
Alternative	CIXI JIANGYUAN ELECTRONICS CO LTD	3122	22-26 AWG for indicator, 16-20 AWG for others, 300VAC, 200°C (E338998)	EN 60335-2-9 EN 60335-1	Tested with appliance
Alternative	QIFURUI ELECTRONICS CO	3122	22-26 AWG for indicator, 16-20 AWG for others, 300VAC, 200°C (E211048)	EN 60335-2-9 EN 60335-1	Tested with appliance
Insulation of internal wire	SIN TIONG WAH ELECTRIC PRODUCTS (SHENZHEN) CO LTD	FSG-3A	VW-1 200°C (E146955)	EN 60335-2-9 EN 60335-1	Tested with appliance
Alternative	JIANGYIN YUANDA ELECTRICAL MATERIAL CO LTD	QFR-SF	VW-1 200°C (E255609)	EN 60335-2-9 EN 60335-1	Tested with appliance

IEC 60335-2-9					
Clause	Requirement + Test		Result - Remark		Verdict
Motor for AF-001, AF-006, AF-006A, AF-006D, AF-015, AF-015A, AF-001B, AF-007C, AF-022	Shenzhen Zhaoli Motor Ltd.	YJ61/16	220-240V~, 50/60 Hz, Class 180	EN 60335-2-9 EN 60335-1	Tested with appliance
Motor for AF-005, AF-005A, AF-005-1, AF-005A-1	Shenzhen Zhaoli Motor Ltd.	YJ61/300	220-240V~, 50/60 Hz, Class 180	EN 60335-2-9 EN 60335-1	Tested with appliance
Motor for AF-002, AF-002A, AF-009, AF-009A, AF-010, AF-010A, AF-012, AF-012A, AF-016, AF-016A, AF-017A	Shenzhen Zhaoli Motor Ltd.	YJ61/200	220-240V~, 50/60 Hz, Class 180	EN 60335-2-9 EN 60335-1	Tested with appliance
-Thermal link for motor	Zhangzhou Aupo Electronics Co.,Ltd.	A8-F	250V~, 2A, 150°C	DIN EN 60691	VDE*/40008720
-Alternative	Xiamen SET Electronics co., Ltd.	SET K7	250V~, 2A, 150°C	DIN EN 60691	VDE*/40017055
-Winding for motor	Guandong Wellkey Electric Material Co., Ltd.	QZY-2/180	Class 180 (E211138)	EN 60335-2-9 EN 60335-1	Tested with appliance
-Alternative	ZHEJIANG HONGBO TECHNOLOGY CO LTD	QZY-x/180	Class 180 (E221719)	EN 60335-2-9 EN 60335-1	Tested with appliance
-Bobbin for motor	E I DUPONT DE NEMOURS & CO INC	PET	FR530 (E69939)	EN 60335-2-9 EN 60335-1	Tested with appliance
-Insulating tape for motor	3M COMPANY ELECTRICAL MARKETS DIV (EMD)	69(a)	200°C (E17385)	EN 60335-2-9 EN 60335-1	Tested with appliance
-Alternative	XINFENG GHILLIE ELECTRICAL MATERIALS CO LTD	JL-B308	200°C (E326305)	EN 60335-2-9 EN 60335-1	Tested with appliance

IEC 60335-2-9					
Clause	Requirement + Test			Result - Remark	Verdict
Optional Motor for AF-005, AF-005A, AF-005-1, AF-005A-1	Ningbo Yikade Electrical Appliance Technology Co., Ltd.	YJ61-20	220-240V~, 50/60 Hz, Class 180	EN 60335-2-9 EN 60335-1	VDE*/ 40051613
-Thermal link for motor	Zhangzhou Aupo Electronics Co.,Ltd.	A8-F	250V~, 2A, 150°C	EN 60335-2-9 EN 60335-1	VDE*/ 40008720
-Alternative	Xiamen SET Electronics co., Ltd.	SET K7	250V~, 2A, 150°C	EN 60335-2-9 EN 60335-1	VDE*/ 40017055
-Winding for motor	ZHEJIANG YLC WIRES CO LTD	xUEW/NY/180	Class 180 (E320729)	EN 60335-2-9 EN 60335-1	Tested with appliance
-Bobbin for motor	CELANESE INTERNATIONAL CORP	PA66	FR50(+)(f1) (E41938)	EN 60335-2-9 EN 60335-1	Tested with appliance
-Insulating tape for motor	3M COMPANY	69(a)	200°C (E17385)	EN 60335-2-9 EN 60335-1	Tested with appliance
Motor for AF-051	Yuyao yingqiang micromotor	YJ58-16	220-240V~, 50/60 Hz, Class 180	EN 60335-2-9 EN 60335-1	Tested with appliance
-Winding for motor	SUZHOU WUJIANG SHENZHOU BIMETALLIC CABLE CO LTD	2CCAQA-1/180	Class 180 (E333213)	EN 60335-2-9 EN 60335-1	Tested with appliance
-Bobbin for motor	CELANESE INTERNATIONAL CORP	PET	FR530 (E69939)	EN 60335-2-9 EN 60335-1	Tested with appliance
-Insulating tape for motor	3M COMPANY ELECTRICAL MARKETS DIV (EMD)	69(a)	200°C (E17385)	EN 60335-2-9 EN 60335-1	Tested with appliance
Heating element for AF-001, AF-001B, AF-007C	Ningbo Haishu Junlong Electric Appliance Co., Ltd.	AF-001-B07	220-240V~,1000W	EN 60335-2-9 EN 60335-1	Tested with appliance
Heating element for AF-002, AF-002A	Ningbo Haishu Junlong Electric Appliance Co., Ltd.	AF-002-B01	220-240V~,1300W	EN 60335-2-9 EN 60335-1	Tested with appliance
Heating element for AF-005, AF-005A, AF-005-1, AF-005A-1	Ningbo Haishu Junlong Electric Appliance Co., Ltd.	AF-003-402	220-240V~,1700W	EN 60335-2-9 EN 60335-1	Tested with appliance

IEC 60335-2-9					
Clause	Requirement + Test			Result - Remark	Verdict
Heating element for AF-006, AF-006A	Ningbo Haishu Junlong Electric Appliance Co., Ltd.	LOH AF-006-B11	220-240V~, 1000W	EN 60335-2-9 EN 60335-1	Tested with appliance
Heating element for AF-006D, AF-015, AF-015A	Ningbo Haishu Junlong Electric Appliance Co., Ltd.	AF-006-B18	220-240V~, 1200W	EN 60335-2-9 EN 60335-1	Tested with appliance
Heating element for AF-009, AF-009A	Ningbo Haishu Junlong Electric Appliance Co., Ltd.	AF-009-B05	220-240V~, 1400W	EN 60335-2-9 EN 60335-1	Tested with appliance
Heating element for AF-010, AF-010A, AF-016, AF-016A, AF-017A	Ningbo Haishu Junlong Electric Appliance Co., Ltd.	AF-008-B04-1	220-240V~, 1500W	EN 60335-2-9 EN 60335-1	Tested with appliance
Heating element for AF-012, AF-012A	Ningbo Haishu Junlong Electric Appliance Co., Ltd.	AF-012-B05	220-240V~, 1700W	EN 60335-2-9 EN 60335-1	Tested with appliance
Heating element for AF-022	Ningbo Haishu Junlong Electric Appliance Co., Ltd.	AF-022-B01	220-240V~, 1300W	EN 60335-2-9 EN 60335-1	Tested with appliance
Heating element for AF-051	Ningbo Te wei Electric Appliance Co., Ltd.	AF-051-B08	220-240V~, 1000W	EN 60335-2-9 EN 60335-1	Tested with appliance
Wire connector	Heavy Power Co., Ltd.	CE1, CE2, CE5	300V,105°C (E113650)	EN 60335-2-9 EN 60335-1	Tested with appliance
Thermal link for AF-001, AF-006, AF-006A, AF-006D, AF-015, AF-015A, AF-001B, AF-007C, AF-022	Dongguan Better Electronics Technology Co., Ltd.	BTT184C	250V~, 10A, Tf184°C	DIN EN 60691	VDE*/ 40041299
Alternative	Shanghai Xinyuan Electronic Co., Ltd.	RY182	250V~, 10A, Tf184°C	DIN EN 60691	TUV*/ R 50056552
Alternative	Shanghai Xinyuan Electronic Co., Ltd.	RY184	250V~, 10A, Tf184°C	DIN EN 60691	TUV*/ R 50156808
Alternative	SCHOTT Japan Corporation	SF184R0, SF184R1	250V~, 10A, Tf184°C	DIN EN 60691	VDE*/ 40035880
Alternative	Threm-O-Disc Europe B.V.	G4A00184C	250V~, 10A, Tf184°C	DIN EN 60691	VDE*/ 40017228

IEC 60335-2-9					
Clause	Requirement + Test			Result - Remark	Verdict
Alternative	Shenzhen Baisheng Electrical Co., Ltd.	H4Axx184C	250V~,10A, Tf184°C	DIN EN 60691	VDE*/40022386
Alternative	Jiangsu Changsheng Electric Appliance Co., Ltd.	CSRY01 184°C	250V~,10A, Tf184°C	DIN EN 60691	TUV*/R 50208592
Alternative	Jiangyin Zhi – Xiang Electronic Technology Ltd.	RY185	250V~,10A, Tf184°C	DIN EN 60691	TUV*/R 50156815
Alternative	Zhe Jiang aiyisai Electronic Technology LTD	RYD184	250V~,10A, Tf184°C	DIN EN 60691	TUV*/R 50141010
Thermal link for AF-002, AF-002A	Shanghai Xinyuan Electronic Co., Ltd.	RY172	250V~,10A, Tf172°C	DIN EN 60691	TUV*/R 50056552
Alternative	Zhe Jiang aiyisai Electronic Technology LTD	RYD172	250V~,10A, Tf172°C	DIN EN 60691	TUV*/R 50141010
Alternative	Dongguan Better Electronics Technology Co., Ltd.	BTT172C	250V~,10A, Tf172°C	DIN EN 60691	VDE*/40041299
Alternative	Jiangyin Zhi – Xiang Electronic Technology Ltd.	RY169	250V~,10A, Tf172°C	DIN EN 60691	TUV*/R 50156815
Alternative	Shenzhen Baisheng Electrical Co., Ltd.	H4Axx172C	250V~,10A, Tf172°C	DIN EN 60691	VDE*/40022386
Alternative	Threm-O-Disc Europe B.V.	G4A00172C	250V~,10A, Tf172°C	DIN EN 60691	VDE*/40017228
Alternative	Jiangsu Changsheng Electric Appliance Co., Ltd.	CSRY01 172°C	250V~,10A, Tf172°C	DIN EN 60691	TUV*/R 50208592
Alternative	SCHOTT Japan Corporation	SF172R0, SF172R1	250V~,10A, Tf172°C	DIN EN 60691	VDE*/40035880
Alternative	Shanghai Xinyuan Electronic Co., Ltd.	RY172	250V~,10A, Tf172°C	DIN EN 60691	TUV*/R 50156808
Thermal link for AF-051	Zhe Jiang aiyisai Electronic Technology LTD	RYD157	250V~,10A, Tf157°C	DIN EN 60691	TUV*/R 50141010

IEC 60335-2-9					
Clause	Requirement + Test			Result - Remark	Verdict
Alternative	Shanghai Xinyuan Electronic Co., Ltd.	RY157	250V~,10A, Tf157°C	DIN EN 60691	TUV*/ R 50156808
Alternative	Dongguan Better Electronics Technology Co., Ltd.	BTT157C	250V~,10A, Tf157°C	DIN EN 60691	VDE*/ 40041299
Alternative	Shenzhen Baisheng Electrical Co., Ltd.	H4Axx157C	250V~,10A, Tf157°C	DIN EN 60691	VDE*/ 40022386
Alternative	Jiangsu Changsheng Electric Appliance Co., Ltd.	CSRY01 157°C	250V~,10A, Tf157°C	DIN EN 60691	TUV*/ R 50208592
Insulation of thermal link	SIN TIONG WAH ELECTRIC PRODUCTS (SHENZHEN) CO LTD	FSG-3A	VW-1 200°C (E146955)	EN 60335-2-9 EN 60335-1	Tested with appliance
Alternative	JIANGYIN YUANDA ELECTRICAL MATERIAL CO LTD	QFR-SF	VW-1 200°C (E255609)	EN 60335-2-9 EN 60335-1	Tested with appliance
Non-self-resetting thermal cut out for AF-009, AF-009A	Ningbo Tongbao Huashuo Temp. Controller Co., Ltd.	KSD301-R-G	AC 250V, 10A, Tf165°C, T280	EN 60730-1 EN 60730-2-9	TUV*/ R 50205557
Non-self-resetting thermal cut out for AF-010, AF-010A, AF-012, AF-012A, AF-016, AF-016A, AF-017A, AF-005, AF-005-1, AF-005A, AF-005A-1	Ningbo Tongbao Huashuo Temp. Controller Co., Ltd.	KSD301-R-G	AC 250V, 10A, Tf170°C, T280	EN 60730-1 EN 60730-2-9	TUV*/ R 50205557
Heat-shrinkable tube	SHENZHEN WOER HEAT-SHRINKABLE MATERIAL CO LTD	RSFR-H	600V, 125°C, VW-1 (E203950)	EN 60335-2-9 EN 60335-1	Tested with appliance

IEC 60335-2-9					
Clause	Requirement + Test		Result - Remark		Verdict
PCB for AF-002A, AF-005A, AF-006A, AF-009A, AF-010A, AF-012A, AF-015A, AF-016A, AF-017A, AF-007C, AF-005A-1	ZHEJIANG LEUCHTEK TECHNOLOGY CO LTD	PFR-4	Min thickness: 1,6mm, V-0, 130°C (E199273)	EN 60335-2-9 EN 60335-1	Tested with appliance
Alternative	KINGBOARD LAMINATES HOLDINGS LTD	KB-5150	Min thickness: 1,6mm, V-0, 130°C (E123995)	EN 60335-2-9 EN 60335-1	Tested with appliance
Alternative	XIAMEN TOPSUN ELECTRONIC TECHNOLOGY CO LTD	TS-002	Min thickness: 1,6mm, V-0, 130°C (E252242)	EN 60335-2-9 EN 60335-1	Tested with appliance
Alternative	LEUCHTEK ELECTRONICS (ZHEJIANG) CO LTD	PCEM-1	Min thickness: 1,6mm, V-0, 130°C (E199273)	EN 60335-2-9 EN 60335-1	Tested with appliance
X2 capacitor for AF-002A, AF-005A, AF-006A, AF-009A, AF-010A, AF-015A, AF-016A, AF-017A, AF-007C, AF-005A-1	Dain Electronic Co., Ltd.	MPX	275V~, 0,1uF, 40/110/21/C	EN 60384-14	VDE*/ 40018798
Alternative	Dain Electronic Co., Ltd.	MEX	275V~, 0,1uF, 40/100/21/C	EN 60384-14	VDE*/ 40018798
Alternative	Rugao Shuang cheng Electronic Co., Ltd.	MKP	275V~, 0,1uF, 40/100/21/C	EN 60384-14	VDE*/ 40025673
Alternative	Shaoyang Shirong Electronic Co., Ltd.	MKP	275V~, 0,1uF, 40/100/21/C	EN 60384-14	TUV*/ HN 69262154
Alternative	Tenta Electric Industrial Co. Ltd.	MEX	275V~, 0,1uF, 40/100/21/B	EN 60384-14	VDE*/ 119119
Alternative	Dain Electronic Co., Ltd.	MEX	275V~, 0,1uF, 40/110/21/C	EN 60384-14	VDE*/ 40018798
X2 capacitor for AF-012A	Dain Electronic Co., Ltd.	MPX	275V~, 0,22uF, 40/110/21/C	EN 60384-14	VDE*/ 40018798
Alternative	Dain Electronic Co., Ltd.	MEX	275V~, 0,22uF, 40/100/21/C	EN 60384-14	VDE*/ 40018798

IEC 60335-2-9					
Clause	Requirement + Test			Result - Remark	Verdict
Alternative	Tenta Electric Industrial Co. Ltd.	MEX	275V~, 0,22uF, 40/100/21/B	EN 60384-14	VDE*/119119
X2 capacitor for AF-012A of alternative power PCB	Dain Electronic Co., Ltd.	MPX	275V~, 0,1uF, 40/110/21/C	EN 60384-14	VDE*/40018798
Alternative	Dain Electronic Co., Ltd.	MEX	275V~, 0,1uF, 40/100/21/C	EN 60384-14	VDE*/40018798
Alternative	Rugao Shuang cheng Electronic Co., Ltd.	MKP	275V~, 0,1uF, 40/100/21/C	EN 60384-14	VDE*/40025673
Alternative	Shaoyang Shirong Electronic Co., Ltd.	MKP	275V~, 0,1uF, 40/100/21/C	EN 60384-14	TUV*/HN 69262154
Alternative	Tenta Electric Industrial Co. Ltd.	MEX	275V~, 0,1uF, 40/100/21/B	EN 60384-14	VDE*/119119
Relay for AF-002A, AF-006A, AF-009A, AF-010A, AF-012A, AF-015A, AF-016A, AF-017A, AF-007C, AF-005A, AF-005A-1	Ningbo Yong Wei Electronics Co., Ltd.	Y3F-105DM	250V~, 10A DC5V, T105, 1E4	EN 61810-1 Clause 17of IEC/EN 60730-1	TUV*/R 50369779
Alternative	Ningbo Lishun Relay Co.,Ltd.	LSS-T73	250V~, 12A, T85, DC5V , 8E4	EN 61810-1 Clause 17of IEC/EN 60730-1	TUV*/R 50131151
Alternative	Donghai County Tongling Electrical Appliance Co., Ltd.	JQC-3FF-S-H	250V~, 10A, T85, DC5V, 5E4	EN 61810-1 Clause 17of IEC/EN 60730-1	TUV*/R 50316150
Alternative	YUYAO HUI LONG CANG RELAYS MFG FACTORY	973-5VDC-SL-A	250V~, 16A, DC5V, T85, 1E4	EN 61810-1 Clause 17of IEC/EN 60730-1	TUV*/R 50156096
Alternative	DONGGUAN YONGNENG ELECTRONICS CO., LTD	YX202-S-105DM	250V~, 10A, DC5V, T85, 2E4	EN 61810-1 Clause 17of IEC/EN 60730-1	TUV*/R 50106730
Alternative	DONGGUAN YONGNENG ELECTRONICS CO., LTD	YX305-S-105DM	250V~, 10A, DC5V, T105, 2E4	EN 61810-1 Clause 17of IEC/EN 60730-1	TUV*/R 50390979

IEC 60335-2-9					
Clause	Requirement + Test			Result - Remark	Verdict
Alternative	SHENZHEN YUANZE ELECTRIC CO., LTD	Y3F-SS-105DM	250V~, 10A, DC5V, T105, 1E4	EN 61810-1 Clause 17of IEC/EN 60730-1	TUV*/ R 50197243
Alternative	ANHUI MINGGUANG LIFE ELECTRONIC CO., LTD.	BRD-SS-105LM	250V~, 12A, DC5V, T85, 1E4	EN 61810-1 Clause 17of IEC/EN 60730-1	TUV*/ R 50183595
Alternative	ANHUI MINGGUANG LIFE ELECTRONIC CO., LTD.	BRF-SS-105DM	250V~, 12A, DC5V, T85, 1E4	EN 61810-1 Clause 17of IEC/EN 60730-1	TUV*/ R 50208738
Varistor for AF-002A, AF-005A, AF-006A, AF-009A, AF-010A, AF-015A, AF-016A, AF-017A, AF-007C, AF-012A, AF-005A-1	Cerglass MFG Inc	07D471K	AC 2500V, 40/125/21	EN 61051-1	VDE*/ 40028836
Alternative	Centra Science Corp.	07D471K	AC 2500V, 40/085/56	EN 61051-1	VDE*/ 40008220
Alternative	Shantou High-New Technology Dev. Zone Songtian Enterprise Co., Ltd	07D471K	AC 2500V, 40/125/21	EN 61051-1	VDE*/ 40023049
NTC resistor for AF-002A, AF-005A, AF-006A, AF-009A, AF-010A, AF-012A, AF-015A, AF-016A, AF-017A, AF-007C, AF-005A-1	SHENZHEN AMPRON SENSITIVE COMPONENTS CO LTD	MF58	Resistance at 25°C (100k ohm) (E243011)	EN 60335-2-9 EN 60335-1	Tested with appliance
Internal wire for NTC	FOSHAN CITY ZHENG GUAN FLUORPLASTICS WIRE FACTORY	10362	24AWG, 600VAC, 250°C (E307535)	EN 60335-2-9 EN 60335-1	Tested with appliance
Alternative	DONGGUAN ZHIHE ELECTRICAL CABLE TECH CO LTD	10362	24AWG, 600VAC, 250°C (E258239)	EN 60335-2-9 EN 60335-1	Tested with appliance

IEC 60335-2-9					
Clause	Requirement + Test			Result - Remark	Verdict
Signal wire for connect PCB	YUEQING BOYUAN ELECTRONIC WIRE & CABLE CO LTD	2468	26 AWG, 300VAC 80°C (E203561)	EN 60335-2-9 EN 60335-1	Tested with appliance
Alternative	Zhejiang Jiezhu Wire & Cable Co Ltd	2468	26 AWG, 300VAC 80°C (E480750)	EN 60335-2-9 EN 60335-1	Tested with appliance
Fuse for AF-007C	Dongguan Chevron Electronic Technology Co., Ltd.	SET	AC 250V, 2A	DIN EN 60127-1 DIN EN 60127-3	VDE*/ 40038565
Alternative	Shanghai Fullness Electrical Co., Ltd.	TSP	AC 250V, 2A	DIN EN 60127-1 DIN EN 60127-3	TUV*/ R 50315914
Enclosure	Ningbo Jufa Electric Appliance Co., Ltd. (Ningbo Bees Electric Appliance Co., Ltd.)	PP	Min thickness: 2,0 mm	EN 60335-2-9 EN 60335-1	Tested with appliance
Top cover, Knob, Handle cover	Ningbo Jufa Electric Appliance Co., Ltd. (Ningbo Bees Electric Appliance Co., Ltd.)	ABS	Min thickness: 2,0 mm	EN 60335-2-9 EN 60335-1	Tested with appliance
Handle	Ningbo Jufa Electric Appliance Co., Ltd. (Ningbo Bees Electric Appliance Co., Ltd.)	PA66	Min thickness: 2,0 mm	EN 60335-2-9 EN 60335-1	Tested with appliance
Indicator cover	Ningbo Jufa Electric Appliance Co., Ltd. (Ningbo Bees Electric Appliance Co., Ltd.)	AS	Min thickness: 2,0 mm	EN 60335-2-9 EN 60335-1	Tested with appliance
Alternative	Ningbo Jufa Electric Appliance Co., Ltd. (Ningbo Bees Electric Appliance Co., Ltd.)	PC	Min thickness: 2,0 mm	EN 60335-2-9 EN 60335-1	Tested with appliance

IEC 60335-2-9					
Clause	Requirement + Test			Result - Remark	Verdict
Internal plastic	Ningbo Jufa Electric Appliance Co., Ltd. (Ningbo Bees Electric Appliance Co., Ltd.)	PBT	Min thickness: 2,0 mm	EN 60335-2-9 EN 60335-1	Tested with appliance
Alternative	Ningbo Jufa Electric Appliance Co., Ltd. (Ningbo Bees Electric Appliance Co., Ltd.)	PA66	Min thickness: 2,0 mm	EN 60335-2-9 EN 60335-1	Tested with appliance
Air outlet	Ningbo Jufa Electric Appliance Co., Ltd. (Ningbo Bees Electric Appliance Co., Ltd.)	PBT	Min thickness: 2,0 mm	EN 60335-2-9 EN 60335-1 1	Tested with appliance
Alternative	Ningbo Jufa Electric Appliance Co., Ltd. (Ningbo Bees Electric Appliance Co., Ltd.)	PA66	Min thickness: 2,0 mm	EN 60335-2-9 EN 60335-1	Tested with appliance
LCD cover	Ningbo Jufa Electric Appliance Co., Ltd. (Ningbo Bees Electric Appliance Co., Ltd.)	PC	Min thickness: 2,0 mm	EN 60335-2-9 EN 60335-1	Tested with appliance
PCB holder	Ningbo Jufa Electric Appliance Co., Ltd. (Ningbo Bees Electric Appliance Co., Ltd.)	PC	Min thickness: 2,0 mm	EN 60335-2-9 EN 60335-1	Tested with appliance
Supplementary information: 1) Provided evidence ensures the agreed level of compliance. See OD-CB2039.					

29.1	TABLE: Clearances					P
	Overvoltage category			II		—
		Type of insulation:				
Rated impulse voltage (V):	Min. cl (mm)	Basic (mm)	Supplementary (mm)	Reinforced (mm)	Functional (mm)	Verdict / Remark

IEC 60335-2-9						
Clause	Requirement + Test			Result - Remark		Verdict
330	0,2* / 0,5 / 0,8**					N/A
500	0,2* / 0,5 / 0,8**					N/A
800	0,2* / 0,5 / 0,8**					N/A
1 500	0,5 / 0,8** / 1,0***					N/A
2 500	<u>1,5 / 2,0</u> ***	X	X		X	P
4 000	<u>3,0 / 3,5</u> ***			X		P
6 000	5,5 / 6,0***					N/A
8 000	8,0 / 8,5***					N/A
10 000	11,0 / 11,5***					N/A
Supplementary information:						
*) For tracks on printed circuit boards if pollution degree 1 and 2						
**) For pollution degree 3						
***) If the construction is affected by wear, distortion, movement of the parts or during assembly						

29.2	TABLE: Creepage distances, basic, supplementary and reinforced insulation										P
Working voltage (V)	Creepage distance (mm)							Type of insulation			
	Pollution degree										
	1	2			3						
		Material group			Material group						
		I	II	IIIa/IIIb	I	II	IIIa/IIIb*	B**	S**	R**	Verdict
≤50	0,18	0,6	0,85	1,2	1,5	1,7	1,9		—	—	N/A
≤50	0,18	0,6	0,85	1,2	1,5	1,7	1,9	—		—	N/A
≤50	0,36	1,2	1,7	2,4	3,0	3,4	3,8	—	—		N/A
125	0,28	0,75	1,05	1,5	1,9	2,1	2,4		—	—	N/A
125	0,28	0,75	1,05	1,5	1,9	2,1	2,4	—		—	N/A
125	0,56	1,5	2,1	3,0	3,8	4,2	4,8	—	—		N/A
250	<u>0,56</u>	1,25	1,8	2,5	3,2	3,6	<u>4,0</u>	X	—	—	P
250	0,56	1,25	1,8	2,5	3,2	3,6	<u>4,0</u>	—	X	—	P
250	1,12	2,5	3,6	5,0	6,4	7,2	<u>8,0</u>	—	—	X	P
400	1,0	2,0	2,8	4,0	5,0	5,6	6,3		—	—	N/A
400	1,0	2,0	2,8	4,0	5,0	5,6	6,3	—		—	N/A
400	2,0	4,0	5,6	8,0	10,0	11,2	12,6	—	—		N/A

IEC 60335-2-9											
Clause	Requirement + Test							Result - Remark			Verdict
500	1,3	2,5	3,6	5,0	6,3	7,1	8,0		—	—	N/A
500	1,3	2,5	3,6	5,0	6,3	7,1	8,0	—		—	N/A
500	2,6	5,0	7,2	10,0	12,6	14,2	16,0	—	—		N/A
>630 and ≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0		—	—	N/A
>630 and ≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0	—		—	N/A
>630 and ≤800	3,6	6,4	9,0	12,6	16,0	18,0	20,0	—	—		N/A
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5		—	—	N/A
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5	—		—	N/A
>800 and ≤1000	4,8	8,0	11,2	16,0	20,0	22,0	25,0	—	—		N/A
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0		—	—	N/A
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0	—		—	N/A
>1000 and ≤1250	6,4	10,0	14,2	20,0	25,0	28,0	32,0	—	—		N/A
>1250 and ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0		—	—	N/A
>1250 and ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0	—		—	N/A
>1250 and ≤1600	8,4	12,6	18,0	25,0	32,0	36,0	40,0	—	—		N/A
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0		—	—	N/A
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0	—		—	N/A
>1600 and ≤2000	11,2	16,0	22,0	32,0	40,0	44,0	50,0	—	—		N/A
>2000 and ≤2500	7,5	10,0	14,0	20,0	25,0	28,0	32,0		—	—	N/A
>2000 and ≤2500	7,5	10,0	14,0	20,0	25,0	28,0	32,0	—		—	N/A
>2000 and ≤2500	15,0	20,0	28,0	40,0	50,0	56,0	64,0	—	—		N/A
>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0		—	—	N/A
>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0	—		—	N/A
>2500 and ≤3200	20,0	25,0	36,0	50,0	64,0	72,0	80,0	—	—		N/A
>3200 and ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0		—	—	N/A
>3200 and ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0	—		—	N/A
>3200 and ≤4000	25,0	32,0	44,0	64,0	80,0	90,0	100,0	—	—		N/A
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0		—	—	N/A
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0	—		—	N/A
>4000 and ≤5000	32,0	40,0	56,0	80,0	100,0	112,0	126,0	—	—		N/A
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0		—	—	N/A
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0	—		—	N/A

IEC 60335-2-9											
Clause	Requirement + Test							Result - Remark			Verdict
>5000 and ≤6300	40,0	50,0	72,0	100,0	126,0	142,0	160,0	—	—		N/A
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0		—	—	N/A
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0	—		—	N/A
>6300 and ≤8000	50,0	64,0	90,0	126,0	160,0	180,0	200,0	—	—		N/A
>8000 and ≤10000	32,0	40,0	56,0	80,0	100,0	110,0	125,0		—	—	N/A
>8000 and ≤10000	32,0	40,0	56,0	80,0	100,0	110,0	125,0	—		—	N/A
>8000 and ≤10000	64,0	80,0	112,0	160,0	200,0	220,0	250,0	—	—		N/A
>10000 and ≤12500	40,0	50,0	71,0	100,0	125,0	140,0	160,0		—	—	N/A
>10000 and ≤12500	40,0	50,0	71,0	100,0	125,0	140,0	160,0	—		—	N/A
>10000 and ≤12500	80,0	100,0	142,0	200,0	250,0	280,0	320,0	—	—		N/A
Supplementary information:											
*) Material group IIIb is allowed if the working voltage does not exceed 50 V											
**) B = Basic insulation, S = Supplementary insulation, R = Reinforced insulation											

29.2	TABLE: Creepage distances, functional insulation								P
Working voltage (V)	Creepage distance (mm)							Verdict / Remark	
	Pollution degree								
	1	2			3				
		Material group			Material group				
		I	II	IIIa/IIIb	I	II	IIIa/IIIb*		
≤10	0,08	0,4	0,4	0,4	1,0	1,0	1,0	N/A	
50	0,16	0,56	0,8	1,1	1,4	1,6	1,8	N/A	
125	0,25	0,71	1,0	1,4	1,8	2,0	2,2	N/A	
250	0,42	1,0	1,4	2,0	2,5	2,8	3,2	P	
400	0,75	1,6	2,2	3,2	4,0	4,5	5,0	N/A	
500	1,0	2,0	2,8	4,0	5,0	5,6	6,3	N/A	
>630 and ≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0	N/A	
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5	N/A	
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0	N/A	
>1250 and ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0	N/A	
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0	N/A	
>2000 and ≤2500	7,5	10,0	14,0	20,0	25,0	28,0	32,0	N/A	
>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0	N/A	

IEC 60335-2-9									
Clause	Requirement + Test							Result - Remark	Verdict

>3200 and ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0	N/A
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0	N/A
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0	N/A
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0	N/A
>8000 and ≤10000	32,0	40,0	56,0	80,0	100,0	110,0	125,0	N/A
>10000 and ≤12500	40,0	50,0	71,0	100,0	125,0	140,0	160,0	N/A

Supplementary information:

*) Material group IIIb is allowed if the working voltage does not exceed 50 V

30.1	TABLE: Ball Pressure Test of Thermoplastics							P
Allowed impression diameter (mm)							2,0mm	—
Object/ Part No./ Material	Manufacturer/ trademark		Test temperature (°C)		Impression diameter (mm)			
External enclosure plastic	Refer to table 24.1		130		1,8			
Internal enclosure	Refer to table 24.1		174		1,4			
Supplementary information:								

30.2	TABLE: Resistance to heat and fire - Glow wire tests							P
Object/ Part No./ Material	Manufacturer / trademark	Glow wire test (GWT); (°C)						Verdict
		550	650		750		850	
			te	ti	te	ti		
External enclosure plastic	Refer to table 24.1				NI	X	P	
Timer	Refer to table 24.1				NI	X	P	
Internal enclosure	Refer to table 24.1				NI	X	P	
Interlock switch	Refer to table 24.1				NI	X	P	
Thermostat	Refer to table 24.1				NI	X	P	
Object/ Part No./ Material	Manufacturer / trademark	Glow-wire flammability index (GWFI), °C				GW ignition temp. (GWIT), °C		Verdict
		550	650	750	850	675	775	
N/A							N/A	
The test specimen passed the glow wire test (GWT) with no ignition [(te – ti) ≤ 2s] (Yes/No):							Yes	

IEC 60335-2-9			
Clause	Requirement + Test	Result - Remark	Verdict

If no, then surrounding parts passed the needle-flame test of annex E (Yes/No)			N/A
The test specimen passed the test by virtue of most of the flaming material being withdrawn with the glow-wire (Yes/No)?.....			Yes
Ignition of the specified layer placed underneath the test specimen (Yes/No)			No
Supplementary information: - 550 °C GWT not relevant (or applicable) to parts of material classified at least HB40 or if relevant HBF - The GWIT pre-selection option, the 850 °C GWFI pre-selection option, and the 850 °C GWT are not relevant (or applicable) for attended appliances			

Appendix – Photographs

Photo 1.

Description: Overall view of AF-051



Photo 2.

Description: Overall view of AF-051



Appendix – Photographs

Photo 3.

Description: Overall view of AF-051



Photo 4.

Description: Overall view of AF-051



Appendix – Photographs


Photo 5.

Description: Overall view of AF-051



Photo 6.

Description: Overall view of AF-051

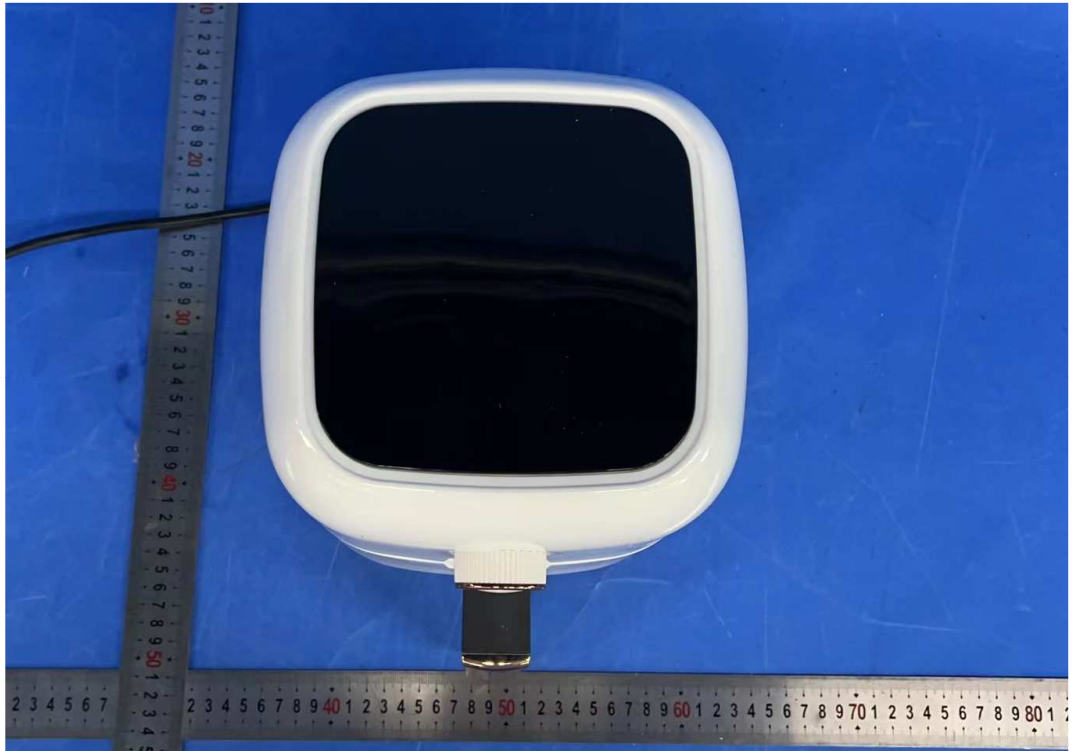

Appendix – Photographs


Photo 7.

Description: Overall view of AF-051



Photo 8.

Description: Interlock switch and power cord view of AF-051

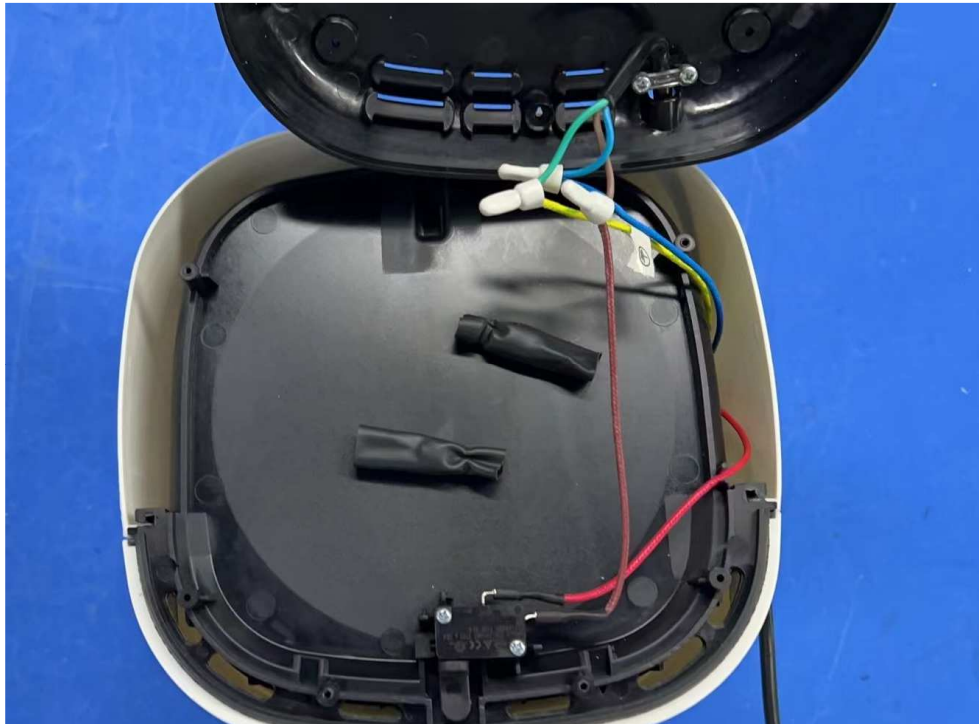

Appendix – Photographs

Photo 9.

Description: Internal view of AF-051



Photo 10.

Description: Internal view of AF-051



Appendix – Photographs

Photo 11.

Description: Internal view of AF-051


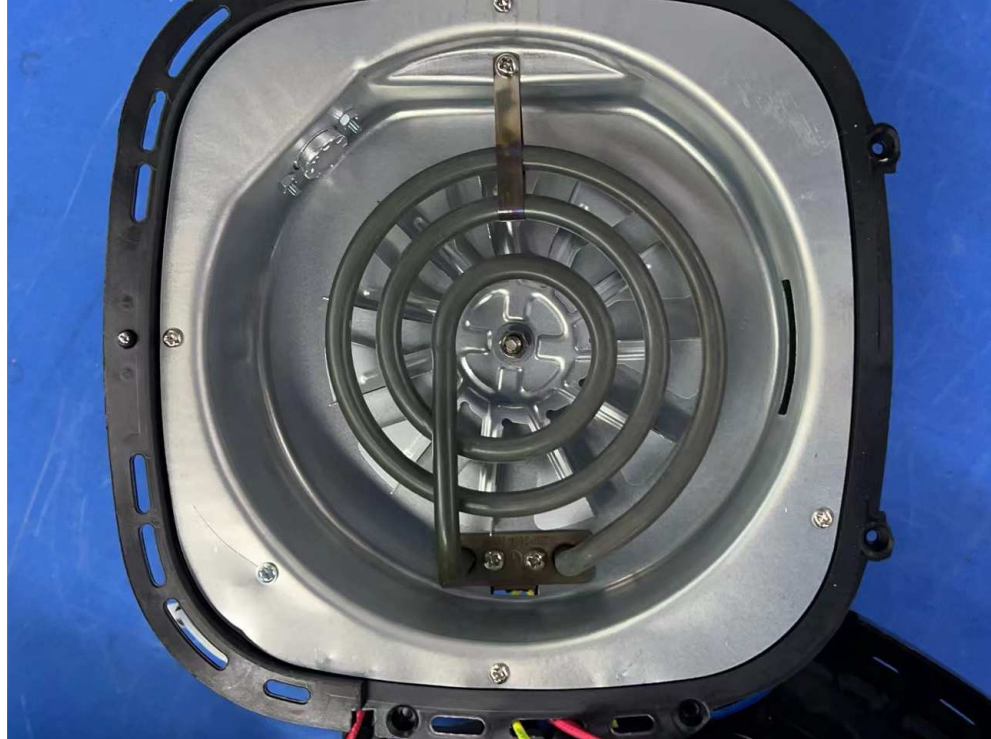


Photo 12.

Description: Internal view of AF-051

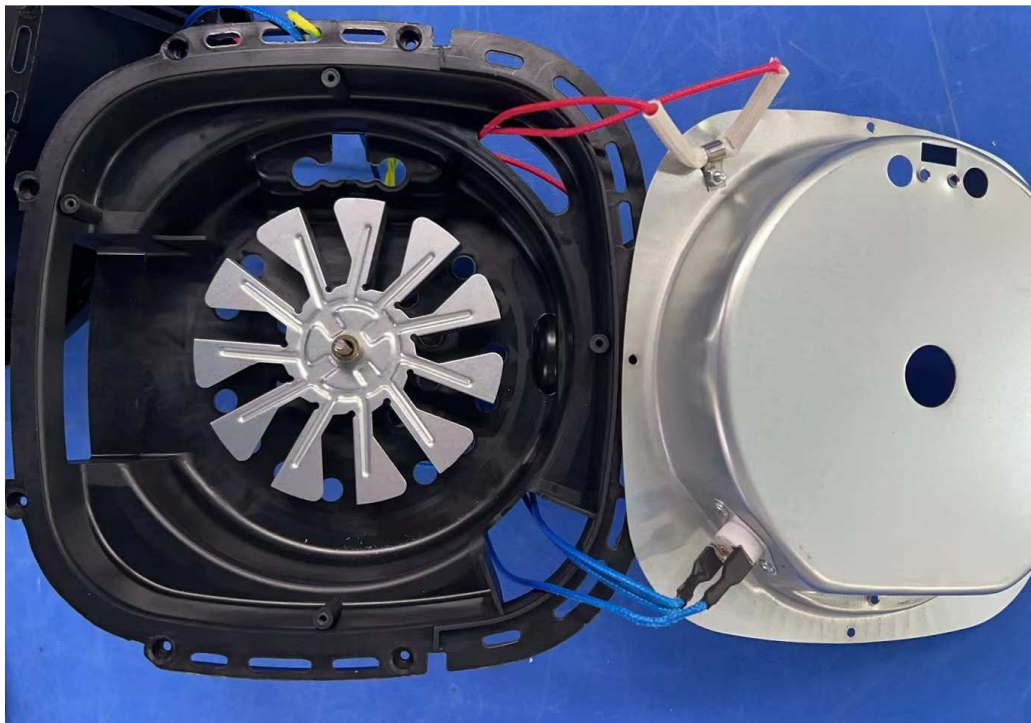

Appendix – Photographs

Photo 13.

Description: Heater element view of AF-051



Photo 14.

Description: Motor view of AF-051



Appendix – Photographs

Photo 15.

Description: Motor view of AF-051



Photo 16.

Description: Motor view of AF-051



Appendix – Photographs

Photo 17.

Description: Optional motor view for AF-005, AF-005-1, AF-005A and AF-005A-1

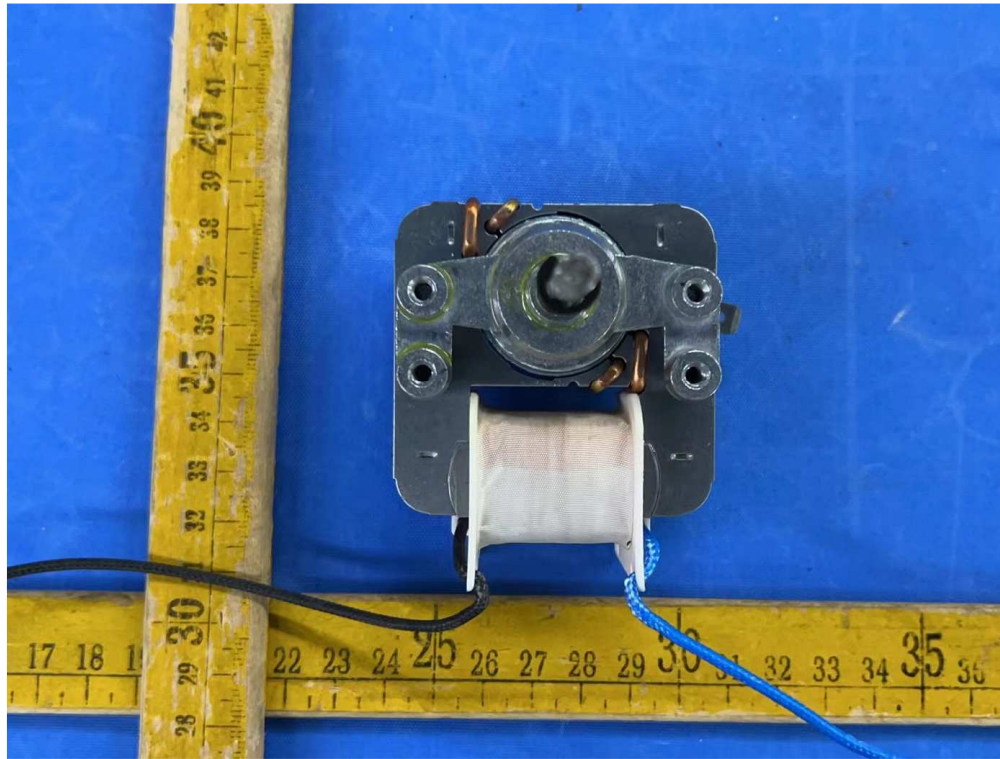


Photo 18.

Description: Optional motor view for AF-005, AF-005-1, AF-005A and AF-005A-1



Appendix – Photographs

Photo 19.

Description: Optional motor view for AF-005, AF-005-1, AF-005A and AF-005A-1

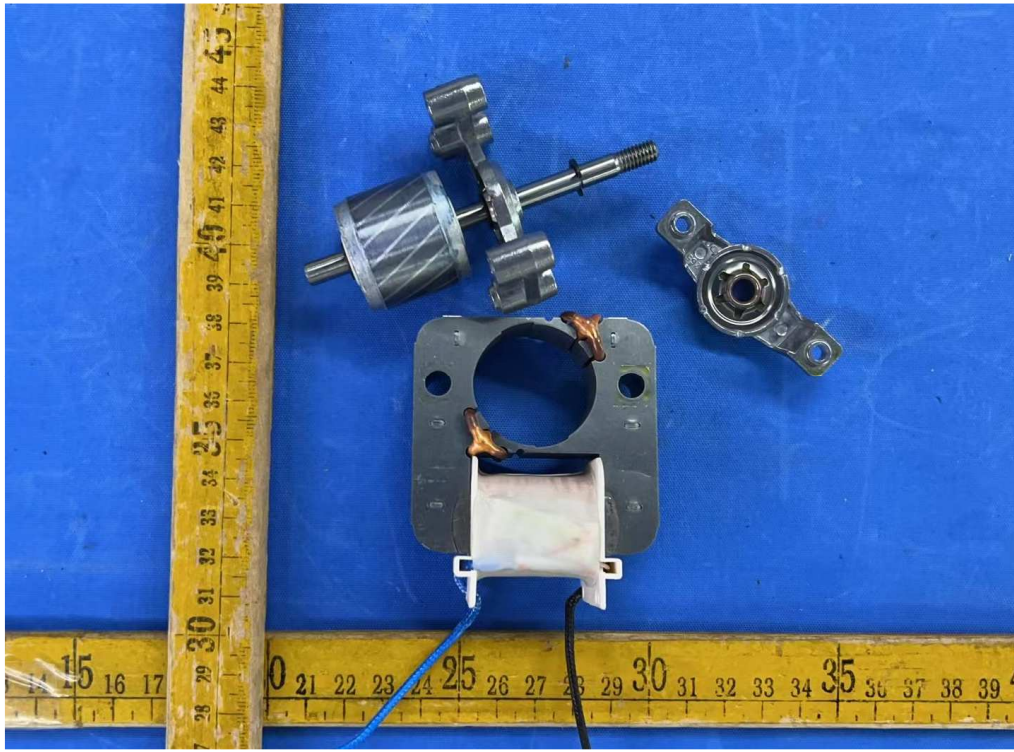


Photo 20.

Description: Optional motor view for AF-005, AF-005-1, AF-005A and AF-005A-1

